


ABC COMPUTER COMPANY, LTD.  
ETHERNET A3251

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

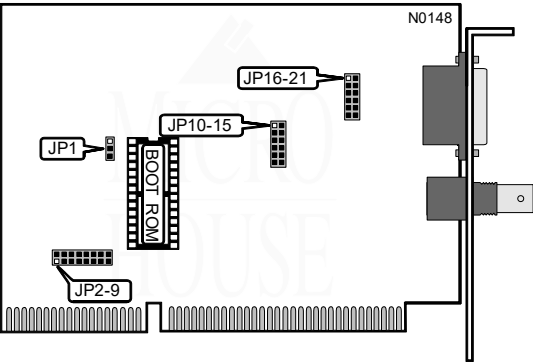

INTERRUPT REQUEST				
IRQ	JP6	JP7	JP8	JP9
2	Closed	Open	Open	Open
i3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

BOOT ROM	
Type	JP1
iEnabled	Pins 1 & 2 Closed
Disabled	Pins 2 & 3 Closed

CABLE TYPE		
Type	JP10 - JP13 & JP15	JP16 - JP18 & JP20 - JP21
iRG-58A/U 50ohm coaxial	Closed	Open
AUI transceiver via DB-15 port	Open	Closed

Continued on next page . . .

# ABC COMPUTER COMPANY, LIMITED

## ETHERNET A3251

... continued from previous page

I/O BASE ADDRESS				
I/O Address	SW1/1	SW1/2	SW1/3	SW1/4
280-29F	On	On	On	On
i2A0-2BF	On	Off	On	On
2C0-2DF	On	On	Off	On
2E0-2FF	On	Off	Off	On
300-31F	On	On	On	Off
320-33F	On	Off	On	Off
340-35F	On	On	Off	Off
360-37F	On	Off	Off	Off

BASE MEMORY ADDRESS		
Base Address	SW1/5	SW1/6
C0000-C3FFF	On	On
C4000-C7FFF	Off	On
C8000-CBFFF	On	Off
iCC000- CFFFF	Off	Off

MISCELLANEOUS NOTES
Different drivers must be used for the National & the Fujitsu chipset cards, & are not interchangeable. Fujitsu adapters may be used for either 8 or 16 bit Fujitsu cards. While the National chipset cards require a different driver for an 8 or 16 bit card.