


AMERICAN RESEARCH CORPORATION

P C N - 0 0 6

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear bus
Wiring Type RG58A/U 50ohm coaxial
 DIX transceiver via DB-15 port
Boot ROM Available

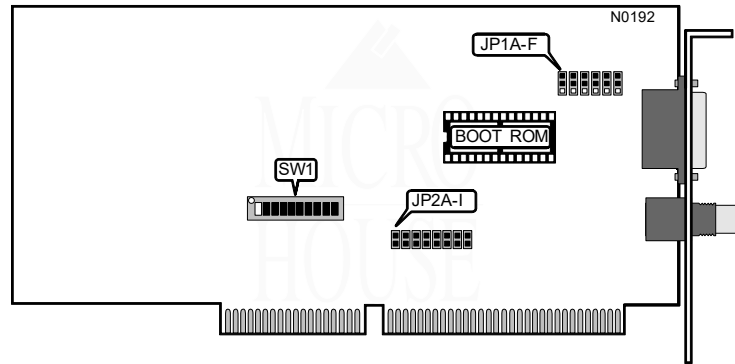

I/O BASE ADDRESS					
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
200h	Off	On	On	On	On
220h	Off	On	On	On	Off
240h	Off	On	On	Off	On
260h	Off	On	On	Off	Off
280h	Off	On	Off	On	On
2A0h	Off	On	Off	On	Off
2C0h	Off	On	Off	Off	On
2E0h	Off	On	Off	Off	Off
i300h	Off	Off	On	On	On
320h	Off	Off	On	On	Off
340h	Off	Off	On	Off	On
360h	Off	Off	On	Off	Off
380h	Off	Off	Off	On	On
3A0h	Off	Off	Off	On	Off
3C0h	Off	Off	Off	Off	On
3E0h	Off	Off	Off	Off	Off

Continued next page . . .

BOOT ROM	
Setting	SW1/6
iDisabled	Off
Enabled	On

BOOT ROM ADDRESS				
Address	SW1/7	SW1/8	SW1/9	SW1/10
C8000h	On	On	Off	On
CC000h	On	On	Off	Off
D0000h	On	Off	On	On
D4000h	On	Off	On	Off
D8000h	On	Off	Off	On
iDC000h	On	Off	Off	Off
E0000h	Off	On	On	On

CABLE TYPE	
Type	JP1A - JP1F
iRG-58A/U 50ohm coaxial	Pins 1 & 2 Closed
DIX transceiver via DB-15 port	Pins 2 & 3 Closed

INTERRUPT REQUEST				
IRQ	JP2A	JP2B	JP2C	JP2D
2	Closed	Open	Open	Open
i3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

DMA CHANNEL				
Channel	JP1F	JP1F	JP1H	JP1I
iDMA5	Closed	Open	Closed	Open
DMA6	Open	Closed	Open	Closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP2E	Open