


CABLETRON SYSTEMS, INC. E1020/-X (Coaxial)

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Not Available

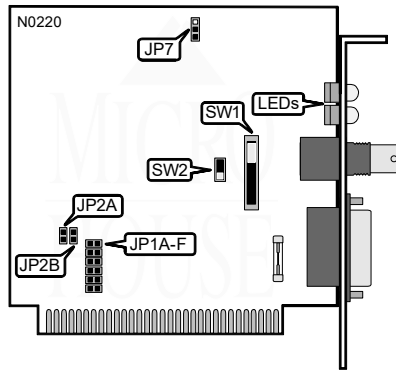

INTERRUPT REQUEST						
IRQ	JP1A	JP1B	JP1C	JP1D	JP1E	JP1F
2/9	Open	Open	Open	Open	Open	Closed
i3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Closed	Open

I/O BASE ADDRESS		
Address	JP2	JP3
i220h	Closed	Closed
280h	Closed	Open
300h	Open	Closed
380h	Open	Open

CABLE TYPE		
Type	SW1	JP7
iRG-58A/U 50ohm coaxial	On	Pins 1 & 2 Closed
AUI transceiver via DB-15 port	Off	Pins 2 & 3 Closed
Note: JP7 is used to enabled the DC converter on the card to supply power to coaxial networks.		


Continued on next page . . .

CABLETRON SYSTEMS, INC.

E 1020/-X (Coaxial)

... continued from previous page

SIGNAL QUALITY ERROR (SQE) TEST	
Setting	SW2
Disabled	Off
Enabled	On
Note: Signal Quality Error (SQE) is a test of the collision circuitry and path.	



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
1	Green	On/Blinking	Data is being transmitted
1	Green	Off	Data is not being transmitted
2	Red	On/Blinking	Collision detected on network
2	Red	Off	Normal operation
3	Yellow	On/Blinking	Data is being received
3	Yellow	Off	Data is not being received
4	Green	On	Card is receiving power
4	Green	Off	Card is not receiving power