


CSS LABORATORIES, INC.
LAN 2100

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	Shielded/Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Available

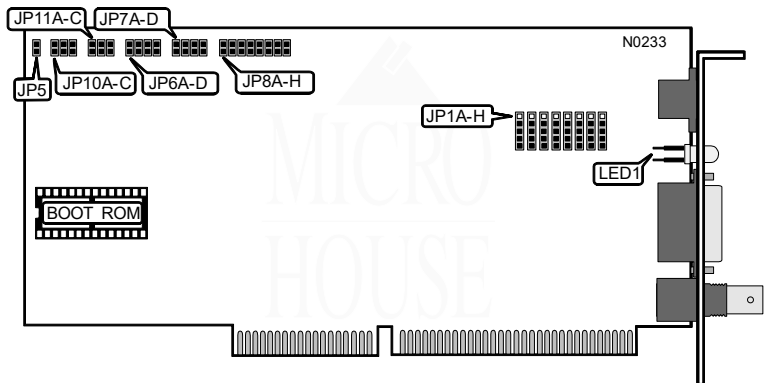

CABLE TYPE	
Type	JP1A - JP1H
Shielded/Unshielded twisted pair	Pins 1 & 2 Closed
AUI transceiver via DB-15 port	Pins 3 & 4 closed
RG-58A/U 50ohm coaxial	Pins 4 & 5 closed

WAIT STATE	
Setting	JP5
i0 wait states	Open
1 wait state	Closed

DMA CHANNEL								
Channel	JP6A	JP6B	JP6C	JP6D	JP7A	JP7B	JP7C	JP7D
DMA3	Closed	Open	Open	Open	Closed	Open	Open	Open
DMA5	Open	Closed	Open	Open	Open	Closed	Open	Open
DMA6	Open	Open	Closed	Open	Open	Open	Closed	Open
DMA7	Open	Open	Open	Closed	Open	Open	Open	Closed

Continued on next page . . .

CSS LABORATORIES, INC.
LAN 2100

... continued from previous page

INTERRUPT REQUEST								
IRQ	JP8A	JP8B	JP8C	JP8D	JP8E	JP8F	JP8G	JP8H
2	Closed	Open	Open	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Closed

I/O BASE ADDRESS			
Address	JP10A	JP10B	JP10C
220h	Open	Closed	Open
300h	Closed	Closed	Closed
320h	Open	Closed	Closed
340h	Closed	Open	Closed
360h	Open	Open	Closed
380h	Closed	Closed	Open

BOOT ROM ADDRESS			
Address	JP11A	JP11B	JP11C
C8000h	Closed	Closed	Open
CC000h	Open	Closed	Open
D0000h	Closed	Open	Open
D4000h	Open	Open	Open
Disabled	Open	Open	Closed

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Data is being transmitted or receiving
LED1	Off	Data is not being transmitted or receiving