


PURE DATA LTD.
PD1516PLUS-T (TWISTED PAIR)

Transfer Rate 2.5Mbps
Data Bus 16-bit ISA
Topology Star
 Linear Bus
Wiring Type Shielded/Unshielded twisted pair
Boot ROM Available

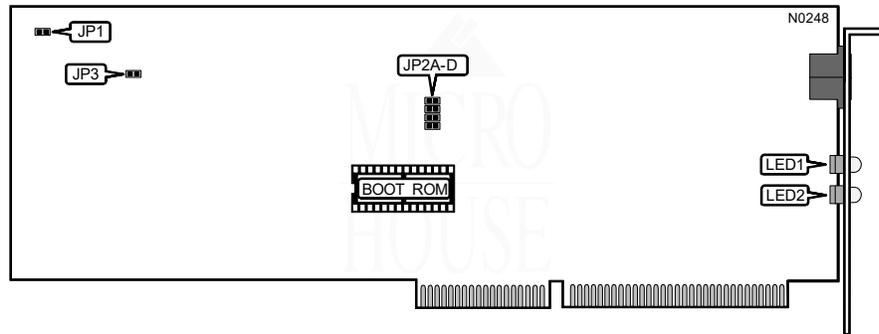

CONFIGURATION MEMORY CLEAR	
Clear	JP1
Normal operation	Open
Clear all addresses and settings from memory	Closed

CARDS INSTALLED				
Card number	JP2A	JP2B	JP2C	JP2D
1	Closed	Open	Open	Open
2	Open	Closed	Open	Open
3	Open	Open	Closed	Open
4	Open	Open	Open	Closed

Note: If there is only one NIC installed in a system, set this option to the "1" position. If this NIC is the second NIC to be installed in a system, set this option to the "2" position and so on.

COMPATIBILITY MODE	
Condition	JP3
Compatibility mode disabled	Open
Compatibility mode enabled	Closed

Note: Compatibility mode should be enabled only when the NIC is installed in a system using a Suntac 286 chipset.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	Blinking	I/O bus activity
LED1	Red	Off	No I/O bus activity
LED2	Green	On	Data is being transmitted or received
LED2	Green	Blinking	No network activity detected, or bad connection