


# ZENITH DATA SYSTEMS

## LAN10FL-AT

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit ISA  
**Topology** Linear Bus  
**Wiring Type** 200 $\mu$  Fiber optic cable  
**Boot ROM** Available

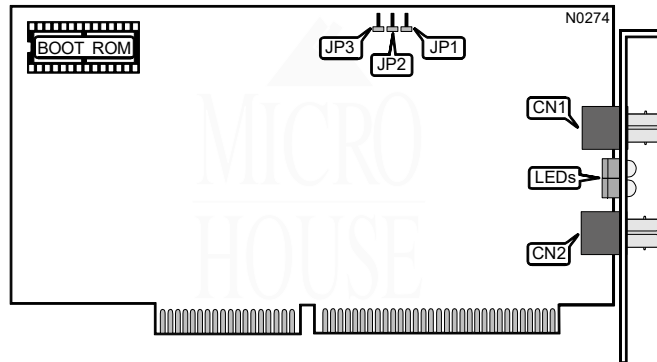

CONNECTIONS	
Purpose	Location
SMA 905 Receive Connector (gray)	CN1
SMA 905 Transmit Connector (black)	CN2

BASE MEMORY ADDRESS	
Address	JP1
CC00h	Closed
D000h	Open


INTERRUPT REQUEST	
IRQ	JP2
5	Closed
10	Open

Continued on next page . . .

ZENITH DATA SYSTEMS  
LAN 10FL - AT

... continued from previous page

ROM ENABLE	
Setting	JP3
iDisabled	Open
Enabled (at address D800h)	Closed



DIAGNOSTIC LED(S)		
LED	Status	Condition
1	On	Data is being received
1	Off	Data is not being received
2	On	Data is being transmitted
2	Off	Data is not being transmitted
3	On	Network connection is good
3	Off	Network connection is broken
4	On	Collision detected on the network
4	Off	The network is free of collisions