


<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	8-bit ISA
<b>Topology</b>	Linear Bus
<b>Wiring Type</b>	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
<b>Boot ROM</b>	Available

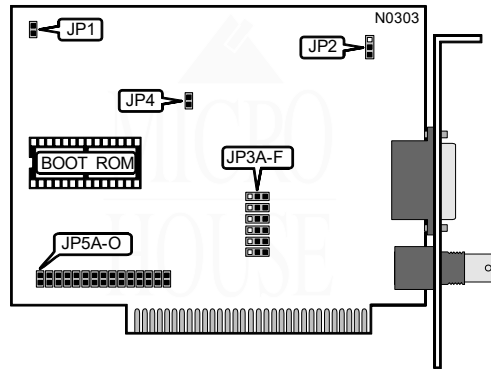

CONNECTORS	
Function	Location
External power LED	JP1

CABLE TYPE		
Type	JP2	JP3A-JP3F
RG-58A/U 50ohm coaxial	Pins 2 & 3 closed	Pins 2 & 3 closed
AUI transceiver via DB-15 port	Pins 1 & 2 closed	Pins 1 & 2 closed

BOOT ROM	
Setting	JP4
Disabled	Open
Enabled	Closed

I/O BASE ADDRESS			
Address	JP5A	JP5B	JP5C
300h	Closed	Closed	Closed
320h	Closed	Closed	Open
340h	Closed	Open	Closed
360h	Closed	Open	Open

Continued on next page . . .

# EDIMAX COMPUTER COMPANY

## 1000C

... continued from previous page

INTERRUPT SETTINGS				
IRQ	JP5D	JP5E	JP5F	JP5G
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

DMA CHANNEL				
Channel	JP5H	JP5I	JP5J	JP5K
DMA1	Closed	Open	Closed	Open
DMA3	Open	Closed	Open	Closed

BOOT ROM ADDRESS				
Address	JP5L	JP5M	JP5N	JP5O
C0000h	Closed	Closed	Closed	Closed
C4000h	Open	Closed	Closed	Closed
IC8000h	Closed	Open	Closed	Closed
CC000h	Open	Open	Closed	Closed
D0000h	Closed	Closed	Open	Closed
D4000h	Open	Closed	Open	Closed
D8000h	Closed	Open	Open	Closed
DC000h	Open	Open	Open	Closed