


EDIMAX COMPUTER COMPANY
2000C

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial AUI transceiver via DB-15 port
Boot ROM	Available

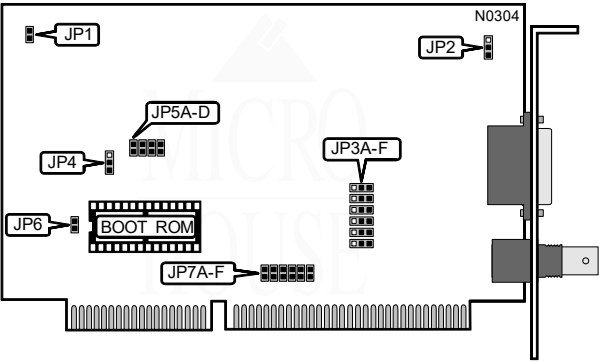

CONNECTORS		
Setting	Jumper	
External power LED	JP1	

CABLE TYPE		
Type	JP2	JP3A-JP3F
iRG-58A/U 50ohm coaxial	Pins 1 & 2 closed	Pins 2 & 3 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed	Pins 1 & 2 closed

COMPATIBILITY MODE	
Mode	JP4
iNormal	Pins 2 & 3 closed
Compatibility mode enabled	Pins 1 & 2 closed
Note: On some systems the data bus timing is not truly IBM PC/AT compatible. If the card is not initializing, enabling compatibility mode may allow the card to operate properly.	

Continued on next page . . .

EDIMAX COMPUTER COMPANY

2000C

... continued from previous page

BOOT ROM ADDRESS				
Address	JP5A	JP5B	JP5C	JP5D
C0000h	Closed	Closed	Closed	Closed
C4000h	Open	Closed	Closed	Closed
iC8000h	Closed	Open	Closed	Closed
CC000h	Open	Open	Closed	Closed
D0000h	Closed	Closed	Open	Closed
D4000h	Open	Closed	Open	Closed
D8000h	Closed	Open	Open	Closed
DC000h	Open	Open	Open	Closed

BOOT ROM	
Setting	JP6
iDisabled	Open
Enabled	Closed

I/O BASE ADDRESS		
Address	JP7A	JP7B
i300h	Closed	Closed
320h	Open	Closed
340h	Closed	Open
360h	Open	Open

INTERRUPT SETTINGS				
IRQ	JP7C	JP7D	JP7E	JP7F
2	Closed	Open	Open	Open
i3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed