


GVC TECHNOLOGIES, INC.  
NIC - 2000B

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	RG58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

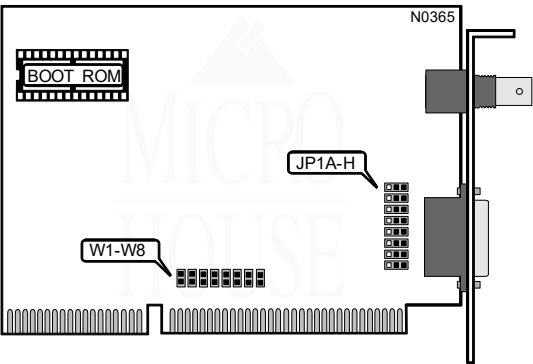

CABLE TYPE	
Type	JP1A - JP1H
iRG58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed

BOOT ROM	
Setting	W1
iDisabled	Open
Enabled	Closed

I/O BASE ADDRESS AND BOOT ROM ADDRESS			
I/O address	Boot ROM Address	V2	V3
i300-31Fh	C8000-CBFFFh	Closed	Closed
320-33Fh	CC000-CFFFFh	Open	Closed
340-35Fh	D0000-D3FFFh	Closed	Open
360-37Fh	D4000-D7FFFh	Open	Open

Continued on next page . . .

**GVC TECHNOLOGIES, INC.**  
**N I C - 2 0 0 0 B**

... continued from previous page

EXTENDED WAIT STATE	
Setting	W4
iDisabled	Open
Enabled	Closed
Note: Some cards require more wait states in the I/O cycle. If you are having difficulties booting, try enabling the extended wait state option. This will add additional wait states to allow for the timing incompatibilities between the card and the host computer.	

INTERRUPT REQUEST				
IRQ	W5	W6	W7	W8
2/9	Open	Open	Open	Closed
i3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open