


EDIMAX COMPUTER COMPANY  
1000C V2.4

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

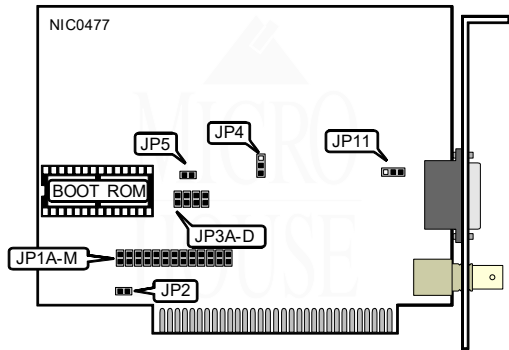

CONNECTORS	
Setting	Location
External power LED.	JP2

I/O BASE ADDRESS			
Address	JP1A	JP1B	JP1C
i300h	Closed	Closed	Closed
320h	Closed	Closed	Open
340h	Closed	Open	Closed
360h	Closed	Open	Open

INTERRUPT SETTINGS						
IRQ	JP1D	JP1E	JP1F	JP1G	JP1H	JP1I
2	Closed	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open
6	Open	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Open	Closed

Continued on next page . . .

# EDIMAX COMPUTER COMPANY

## 1000C V2.4

... continued from previous page

DMA CHANNEL				
Channel	JP1J	JP1K	JP1L	JP1M
iDisabled	Closed	Open	Closed	Open
DMA1	Closed	Open	Closed	Open
DMA3	Open	Closed	Open	Closed

BOOT ROM ADDRESS				
Address	JP3A	JP3B	JP3C	JP3D
C0000h	Closed	Closed	Closed	Closed
C4000h	Open	Closed	Closed	Closed
iC8000h	Closed	Open	Closed	Closed
CC000h	Open	Open	Closed	Closed
D0000h	Closed	Closed	Open	Closed
D4000h	Open	Closed	Open	Closed
D8000h	Closed	Open	Open	Closed
DC000h	Open	Open	Open	Closed

CABLE TYPE		
Type	JP4	JP11
iRG-58A/U 50ohm coaxial	Pins 2 & 3 closed	Pins 2 & 3 closed
AUI transceiver via DB-15 port	Pins 1 & 2 closed	Pins 1 & 2 closed

BOOT ROM	
Setting	JP5
iDisabled	Open
Enabled	Closed