


NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

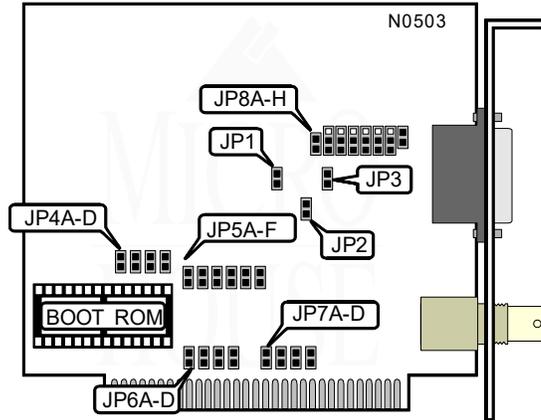

AUI ETHERNET VERSION	
Version	JP1
Version 2	Pins 1 & 2 Closed
Version 1	Pins 2 & 3 Closed
Note: The ethernet version is dependent on the MAU you are using. There should be some indication of the ethernet version on the MAU.	

SEGMENT LENGTH	
Maximum Length	JP2
185 meters	Closed
300 meters	Open
Note: Segment length is the total length of cable between the two farthest cards on the segment. Each card on the segment must have this option set the same.	

ONBOARD TERMINATOR	
Setting	JP3
Disabled	Open
Enabled	Closed
Note: If the card is on either end of a network segment, the onboard terminator can be used instead of using an external terminator.	

Continued on next page . . .

KATRON COMPUTERS, INC.
ET - 100

... continued from previous page

I/O BASE ADDRESS				
Address	JP4A	JP4B	JP4C	JP4D
1300h	Closed	Open	Open	Open
320h	Open	Closed	Open	Open
340h	Open	Open	Closed	Open
360h	Closed	Open	Open	Closed

BOOT ROM	
Setting	JP5A
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

BOOT ROM ADDRESS					
Address	JP5B	JP5C	JP5D	JP5E	JP5F
C0000 - C1FFFh	Closed	Closed	Closed	Closed	Closed
C2000 - C3FFFh	Closed	Closed	Closed	Closed	Open
C4000 - C5FFFh	Closed	Closed	Closed	Open	Closed
C6000 - C7FFFh	Closed	Closed	Closed	Open	Open
C8000 - C9FFFh	Closed	Closed	Open	Closed	Closed
CA000 - CBFFFh	Closed	Closed	Open	Closed	Open
CC000 - CDFFFh	Closed	Closed	Open	Open	Closed
CE000 - CFFFFh	Closed	Closed	Open	Open	Open
D0000 - D1FFFh	Closed	Open	Closed	Closed	Closed
D2000 - D3FFFh	Closed	Open	Closed	Closed	Open
D4000 - D5FFFh	Closed	Open	Closed	Open	Closed
D6000 - D7FFFh	Closed	Open	Closed	Open	Open
D8000 - D9FFFh	Closed	Open	Open	Closed	Closed
DA000 - DBFFFh	Closed	Open	Open	Closed	Open
DC000 - DDFFFh	Closed	Open	Open	Open	Closed
DE000 - DFFFFh	Closed	Open	Open	Open	Open
E0000 - E1FFFh	Open	Closed	Closed	Closed	Closed
E2000 - E3FFFh	Open	Closed	Closed	Closed	Open
E4000 - E5FFFh	Open	Closed	Closed	Open	Closed
E6000 - E7FFFh	Open	Closed	Closed	Open	Open
E8000 - E9FFFh	Open	Closed	Open	Closed	Closed
EA000 - EBFFFh	Open	Closed	Open	Closed	Open
EC000 - EDFFFh	Open	Closed	Open	Open	Closed
EE000 - EFFFFh	Open	Closed	Open	Open	Open
F0000 - F1FFFh	Open	Open	Closed	Closed	Closed
F2000 - F3FFFh	Open	Open	Closed	Closed	Open

Continued on next page ...

... continued from previous page

INTERRUPT REQUEST				
IRQ	JP6A	JP6B	JP6C	JP6D
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

DMA CHANNEL				
Channel	JP7A	JP7B	JP7C	JP7D
Disabled	Open	Open	Open	Open
DMA1	Closed	Open	Closed	Open
DMA3	Open	Closed	Open	Closed

CABLE TYPE			
Type	JP8A	JP8B - JP8G	JP8H
RG-58A/U 50ohm coaxial	Closed	Pins 2 & 3 closed	Open
AUI transceiver via DB-15 port	Open	Pins 1 & 2 closed	Closed