


ANSEL COMMUNICATIONS, INC. NC2000 REVISION A

| | |
|----------------------|---|
| NIC Type | Ethernet |
| Transfer Rate | 10Mbps |
| Data Bus | 16-bit ISA |
| Topology | Linear bus |
| Wiring Type | Unshielded twisted pair RG58A/U 50ohm coaxial AUI transceiver via DB-15 |
| Boot ROM | Available |

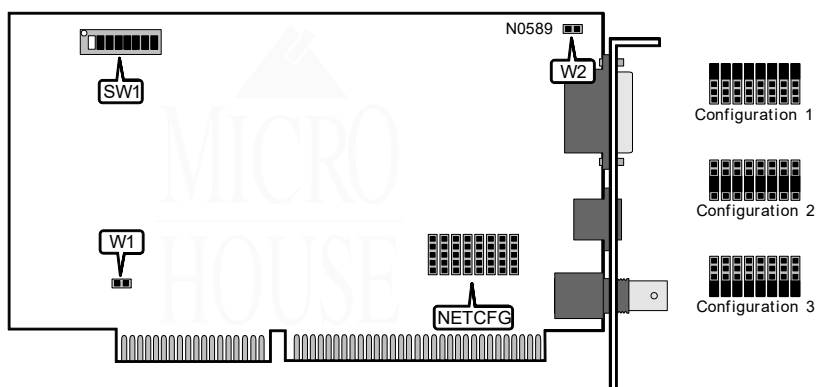

| CABLE TYPE | |
|--------------------------------|-----------------|
| Type | NETCFG |
| Unshielded twisted pair | Configuration 2 |
| RG58A/U 50ohm coaxial | Configuration 3 |
| AUI transceiver via DB-15 port | Configuration 1 |

| BOOT ROM | |
|----------|--------|
| Setting | W1 |
| Disabled | Closed |
| Enabled | Open |

| LINK INTEGRITY | |
|--|--------|
| Function | W2 |
| iLink integrity enabled | Closed |
| Link integrity disabled | Open |
| Note: If card is used in a pre-10BaseT cabling network, disable the link integrity function. | |

Continued on next page . . .

ANSEL COMMUNICATIONS, INC. NC2000 REVISION A

... continued from previous page

| BASE I/O ADDRESS | | |
|------------------|-------|-------|
| Address | SW1/1 | SW1/2 |
| 300h | Off | Off |
| 320h | Off | On |
| 340h | On | Off |
| 360h | On | On |

| BOOT ROM ADDRESS | | |
|------------------|-------|-------|
| Address | SW1/3 | SW1/4 |
| C800h | Off | Off |
| CC00h | Off | On |
| D000h | On | Off |
| D400h | On | On |

| INTERRUPT SETTINGS | | | | |
|--------------------|-------|-------|-------|-------|
| IRQ | SW1/5 | SW1/6 | SW1/7 | SW1/8 |
| 2/9 | Off | On | On | On |
| 3 | On | On | On | Off |
| 4 | On | On | Off | On |
| 5 | On | Off | On | On |