


THE NETWORK INTERFACE CARD TECHNICAL GUIDE

QUICK TECHNOLOGY, INC.

ETHER - 16 +

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear bus
Wiring Type	RG58A/U 50ohm coaxial AUI transceiver via DB15
Boot ROM	Available

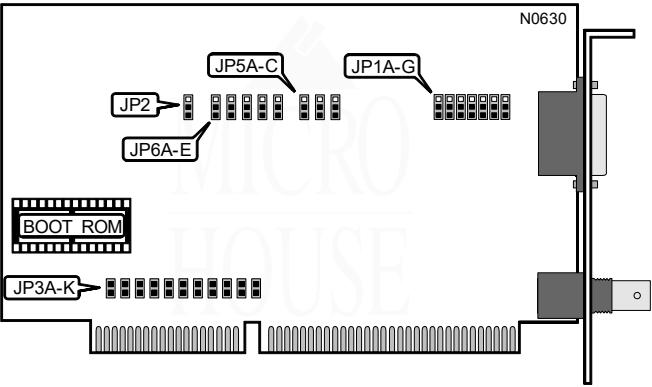

CABLE TYPE	
Type	JP1A-JP1G
RG58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed

BOOT ROM	
Setting	JP2
Enabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

Continued on next page . . .

QUICK TECHNOLOGY, INC.
ETHER - 16 +

... continued from previous page

INTERRUPT SETTINGS											
IRQ	JP3A	JP3B	JP3C	JP3D	JP3E	JP3F	JP3G	JP3H	JP3I	JP3J	JP3K
3	Closed	Open	Open	Open	Open	Open	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open
9	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open
11	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open
12	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open
14	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed

BOOT ROM ADDRESS			
Address	JP5A	JP5B	JP5C
C8000h	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
CC000h	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
D0000h	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
D4000h	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
D8000h	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
DC000h	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed

BASE I/O ADDRESS					
Address	JP6A	JP6B	JP6C	JP6D	JP6E
100h	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3
120h	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3	Pins 1 & 2
140h	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3
160h	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2
180h	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3
1A0h	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2
1C0h	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3
1E0h	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2
200h	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3
220h	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3	Pins 1 & 2
240h	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3
260h	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2

THE NETWORK INTERFACE CARD TECHNICAL GUIDE

280h	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3
------	------------	------------	------------	------------	------------

Continued on next page . . .

QUICK TECHNOLOGY, INC.
ETHER - 16 +

... continued from previous page

BASE I/O ADDRESS (CONTINUED)					
Address	JP6A	JP6B	JP6C	JP6D	JP6E
2A0h	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2
2C0h	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3
2E0h	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2
300h	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3
320h	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3	Pins 1 & 2
340h	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2	Pins 2 & 3
360h	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2	Pins 1 & 2
380h	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3	Pins 2 & 3
3A0h	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3	Pins 1 & 2
3C0h	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 2 & 3
3E0h	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2
Note: Pins designated should be in the closed position.					