


STANDARD MICROSYSTEMS CORPORATION
ETHERCARD ELITE16C ULTRA ADAPTER

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	AUI transceiver via DB-15 port RG58A/U 50ohm coaxial Unshielded twisted pair
Boot ROM	Available

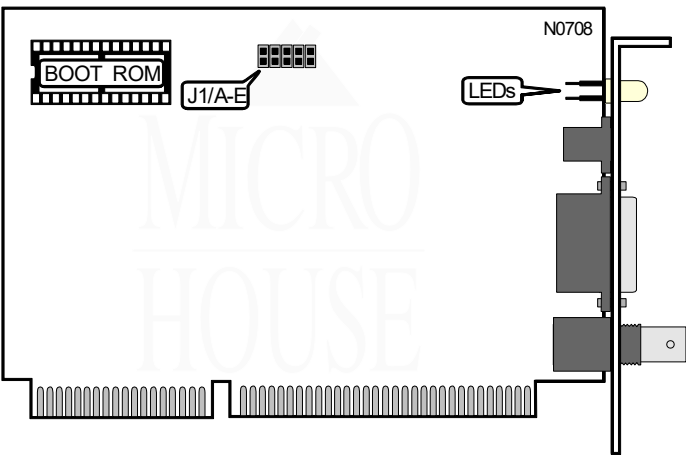


ADDRESS/INTERRUPT CONFIGURATION								
I/O Address	RAM Address	ROM Address	IRQ	W1/A	W1/B	W1/C	W1/D	W1/E
Software	Software	Software	Software	Closed	Open	Open	Open	Open
280h	D000h	None	IRQ3	Open	Closed	Open	Open	Open
300h	CC00h	None	IRQ10	Open	Open	Closed	Open	Open
280h	D000h	D800h	IRQ3	Open	Open	Open	Closed	Open
300h	CC00h	D800h	IRQ10	Open	Open	Open	Open	Closed
Note: The factory default is software configured address and interrupt selection.								

Continued on next page . . .

STANDARD MICROSYSTEMS CORPORATION
ETHERCARD ELITE16C ULTRA ADAPTER

... continued from previous page



DIAGNOSTIC LEDs			
LED	Color	Status	Condition
LED1	Green	Off	Network connection is broken
LED1	Green	On	Network connection is good
LED2	Yellow	Off	Data is not being transmitted/received
LED2	Yellow	On	Data is being transmitted/received