


# ACCTON TECHNOLOGY CORPORATION

## RINGPAIR-4/16T (TR1615 REV. 2)

**NIC Type** Token Ring  
**Transfer Rate** 4/16Mbps  
**Data Bus** 16-bit ISA  
**Topology** Ring  
**Wiring Type** Shielded twisted pair  
 Unshielded twisted pair  
**Boot ROM** Not available

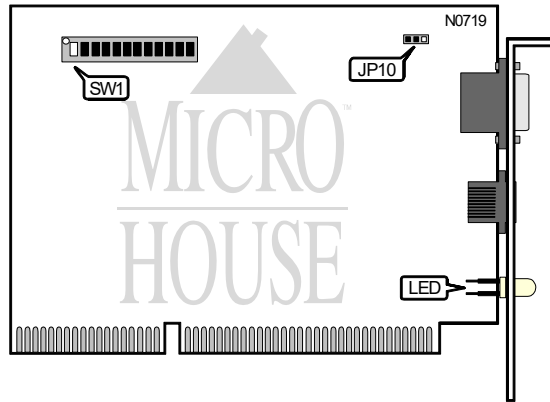

| BASE MEMORY ADDRESS |       |       |       |       |       |       |
|---------------------|-------|-------|-------|-------|-------|-------|
| Address             | SW1/1 | SW1/2 | SW1/3 | SW1/4 | SW1/5 | SW1/6 |
| i CC000h            | On    | Off   | Off   | On    | On    | Off   |
| C0000h              | On    | Off   | Off   | Off   | Off   | Off   |
| C2000h              | On    | Off   | Off   | Off   | Off   | On    |
| C4000h              | On    | Off   | Off   | Off   | On    | Off   |
| C6000h              | On    | Off   | Off   | Off   | On    | On    |
| C8000h              | On    | Off   | Off   | On    | Off   | Off   |
| CA000h              | On    | Off   | Off   | On    | Off   | On    |
| CE000h              | On    | Off   | Off   | On    | On    | On    |
| DC000h              | On    | Off   | On    | On    | On    | Off   |
| D0000h              | On    | Off   | On    | Off   | Off   | Off   |
| D2000h              | On    | Off   | On    | Off   | Off   | On    |
| D4000h              | On    | Off   | On    | Off   | On    | Off   |
| D6000h              | On    | Off   | On    | Off   | On    | On    |
| D8000h              | On    | Off   | On    | On    | Off   | Off   |
| DA000h              | On    | Off   | On    | On    | Off   | On    |
| DE000h              | On    | Off   | On    | On    | On    | On    |

Continued on next page . . .

ACCTON TECHNOLOGY CORPORATION  
RINGPAIR-4/16T (TR1615 REV. 2)

... continued from previous page

| INTERRUPT SELECT |       |       |
|------------------|-------|-------|
| IRQ              | SW1/7 | SW1/8 |
| IRQ3             | Off   | On    |
| IRQ2             | Off   | Off   |
| IRQ6             | On    | Off   |
| IRQ7             | On    | On    |

| PRIMARY/ALTERNATE ADAPTER            |       |
|--------------------------------------|-------|
| Setting                              | SW1/9 |
| 4/16T as primary or sole LAN adapter | Off   |
| 4/16T as alternate LAN adapter       | On    |

| SHARED RAM      |       |       |
|-----------------|-------|-------|
| Setting         | SW1/1 | SW1/1 |
| 16KB shared RAM | Off   | On    |
| 8KB shared RAM  | Off   | Off   |
| 32KB shared RAM | On    | Off   |
| 64KB shared RAM | On    | On    |

| DATA BUS TRANSFER RATE |        |
|------------------------|--------|
| Setting                | SW1/12 |
| 16Mbps                 | Off    |
| 4Mbps                  | On     |

| BUS WIDTH                |                   |
|--------------------------|-------------------|
| Setting                  | JP10              |
| 8-bit bus width enabled  | Pins 2 & 3 closed |
| 16-bit bus width enabled | Pins 1 & 2 closed |

| DIAGNOSTIC LED |       |        |                           |
|----------------|-------|--------|---------------------------|
| LED            | Color | Status | Condition                 |
| LED1           | Green | On     | 16Mbps transmission speed |
| LED1           | Red   | On     | 4Mbps transmission speed  |