


GIGA-BYTE TECHNOLOGY, INC.
GA-500

NIC Type: Ethernet
 Transfer Rate: 10Mbps
 Data Bus: 32-bit VESA local bus
 Topology: Linear Bus
 Star
 Wiring Type: Unshielded twisted pair
 RG58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
 Available
 Boot ROM Available

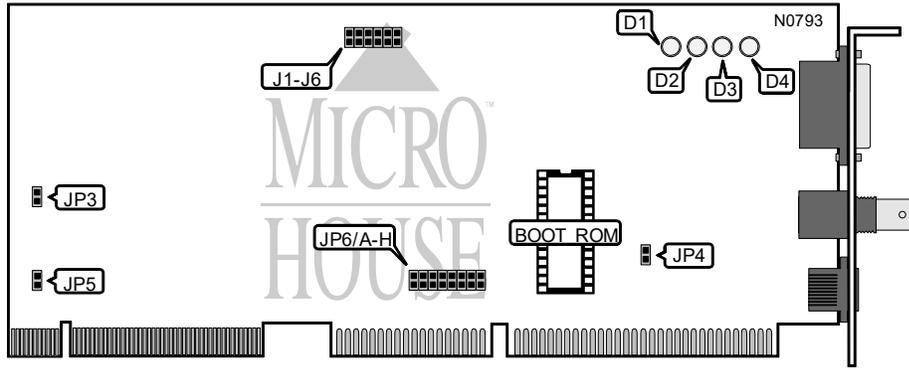

I/O ADDRESS				
Address	J1	J2	JP3	JP5
300h	off	off	on	on
320h	on	off	on	off
340h	off	on	off	on
360h	on	on	off	off

BOOT ROM ADDRESS			
Address	J3	J4	J5
C8000h	off	off	off
CC000h	on	off	off
D0000h	off	on	off
D4000h	on	on	off
D8000h	off	off	on
DC000h	on	off	on
C4000h	off	on	on
E0000h	on	on	on

Continued on next page . . .

GIGA-BYTE TECHNOLOGY, INC.
GA-500

... continued from previous page

INTERRUPT SELECT - JP6								
IRQ	A	B	C	D	E	F	G	H
IRQ2	on	off						
IRQ3	off	on	off	off	off	off	off	off
IRQ4	off	off	on	off	off	off	off	off
IRQ5	off	off	off	on	off	off	off	off
IRQ10	off	off	off	off	on	off	off	off
IRQ11	off	off	off	off	off	on	off	off
IRQ12	off	off	off	off	off	off	on	off
IRQ15	off	on						

BOOT ROM	
Setting	JP4
Enabled	closed
Disabled	open

DIAGNOSTIC LEDES			
LED	Color	Status	Condition
D1	unknown	on	Network connected successfully
D1	unknown	off	Network is not connected
D2	unknown	blinking	Collision detected
D3	unknown	blinking	Data is being received
D4	unknown	blinking	Data is being transmitted

MISCELLANEOUS TECHNICAL NOTES
Do not alter jumper J6, it is factory configured in the closed position.