


EVEREX SYSTEMS, INC.  
SPEEDLINK/PC - 16

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear bus
	Star
Wiring Type	RG58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Location Unidentified

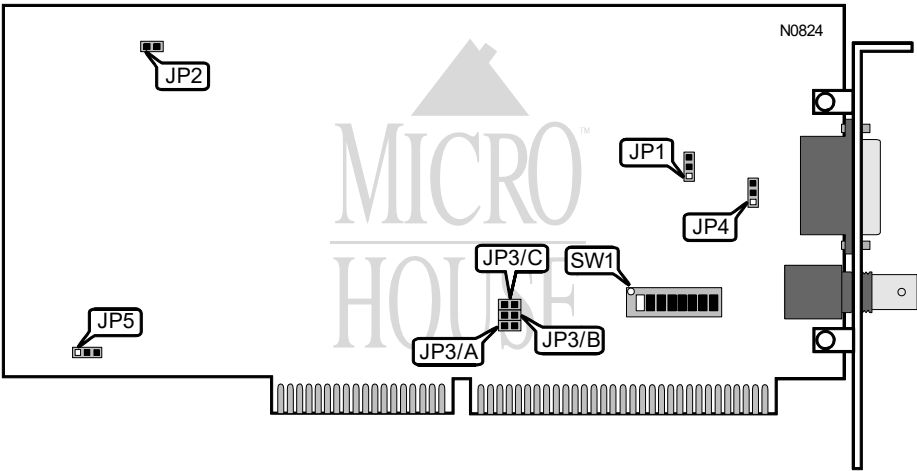

I/O ADDRESS SELECT								
Node	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
340-343h	On	On	On	On	Off	On	Off	Off
348-34Bh	On	Off	On	On	Off	On	Off	Off
358-35Bh	On	On	Off	On	Off	On	Off	Off
358-35Bh	On	Off	Off	On	Off	On	Off	Off
360-363h	On	On	On	Off	Off	On	Off	Off
368-36Bh	On	Off	On	Off	Off	On	Off	Off
370-373h	On	On	Off	Off	Off	On	Off	Off
378-37Bh	On	Off	Off	Off	Off	On	Off	Off
390-393h	On	On	Off	On	On	Off	Off	Off
398-39Bh	On	Off	Off	On	On	Off	Off	Off

Continued on next page . . .

EVEREX SYSTEMS, INC.  
SPEEDLINK/PC-16

... continued from previous page

CABLE TYPE SELECT	
Setting	JP1
Thin Ethernet	Pins 2 & 3 closed
Ethernet	Pins 1 & 2 closed

PERFORMANCE LEVEL SELECT	
Setting	JP2
High	Open
Normal	Closed

BASE MEMORY ADDRESS SELECT			
Address Range	J '3/A	J '3/B	J '3/C
Boot ROM disabled	Closed	Closed	Closed
C4000-C7FFF	Open	Open	Open
C8000-CBFFF	Open	Closed	Closed
CC000-CFFFF	Closed	Open	Closed
D0000-D3FFF	Open	Open	Closed
D4000-D7FFF	Closed	Closed	Open
D8000-DBFFF	Open	Closed	Open
DC000-DFFFF	Closed	Open	Open

ETHERNET FRAME TYPE SELECT	
Setting	JP4
802.3	Pins 1 & 2 closed
802.2	Pins 2 & 3 closed

IOCHRDY	
Setting	JP5
Normal IOCHRDY	Pins 1 & 2 closed
Early IOCHRDY	Pins 2 & 3 closed

MISCELLANEOUS TECHNICAL NOTE
Note: Interrupt selection is configured via a proprietary software package..