
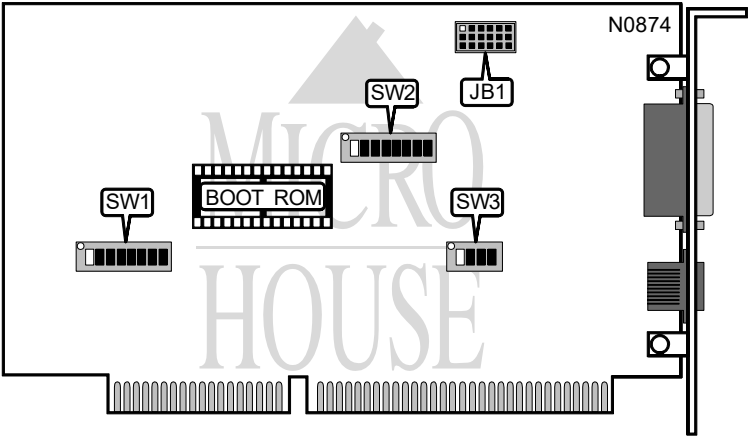


Chapter 5: Jumper Settings
SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 6 1 - D 6 4 0 - V 1

NIC Type	Token Ring
Transfer Rate	4Mbps 16Mbps
Data Bus	16-bit ISA
Topology	Ring
Wiring Type	Shielded twisted pair Unshielded twisted pair
Boot ROM	Available



CABLE TYPE	
JB1	
UTP	STP
☐ 	☐ 

INTERRUPT SELECTION	
IRQ	SW1
2/9	SW1/8 on
i 3	SW1/7 on
5	SW1/6 on
7	SW1/5 on
10	SW1/4 on
11	SW1/3 on
12	SW1/2 on
15	SW1/1 on

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 6 1 - D 6 4 0 - V 1

... continued from previous page.

BASE I/O AND ROM ADDRESS SELECTION			
I/O Address	ROM Address	SW2/1	SW2/2
í 0A20h	CC000h	On	On
1A20h	DC000h	Off	On
2A20h	CE000h	On	Off
3A20h	DE000h	Off	Off

BOOT ROM CONFIGURATION	
Mode	SW2/3
í Disabled	Off
Enabled	On

DMA MODE SELECTION	
Mode	SW2/4
Enabled	On
Disabled	Off

DMA CHANNEL SELECTION	
Channel	SW3
1	SW3/1 on
3	SW3/2 on
í 5	SW3/3 on
6	SW3/4 on

DATA BUS SIZE SELECTION	
Size	SW2/5
í 8-bit	On
16-bit	Off

BUS TIMING CONFIGURATION	
Machine type	SW2/6
í Fully compatible AT	On
Near-compatible AT	Off

BUS SPEED SELECTION	
Speed	SW2/7
í >10MHz	Off
<=10MHz	On

NETWORK SPEED SELECTION	
Speed	SW2/8
í 4Mbps	On
16Mbps	Off