


Chapter 5: Jumper Settings
SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 26361-D633-V2

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair
	AUI Transceiver via DB-15 port
Boot ROM	Available

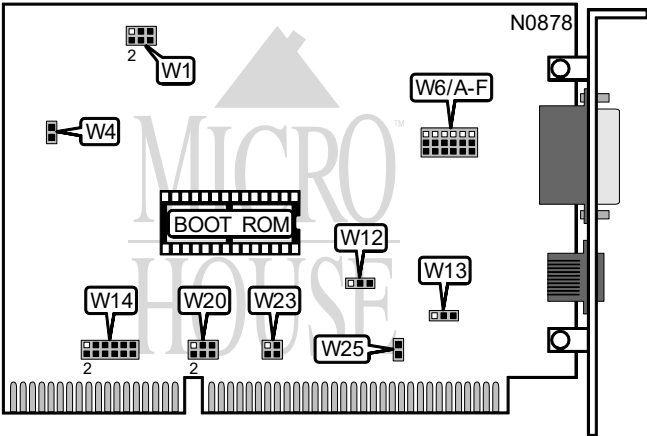

CABLE TYPE SELECTION		
Cable Type	W6/A-F	W12
Unshielded twisted pair	Pins 2 & 3 closed	Pins 2 & 3 closed
AUI Transceiver via DB-15 port	Pins 1 & 2 closed	Pins 1 & 2 closed

BOOT ROM SELECTION	
Mode	W1
Disabled	Pins 3 & 4 open
Enabled	Pins 3 & 4 closed

BASE I/O AND BOOT ROM ADDRESS SELECTION		
Base I/O Address	Boot ROM Address	W1
300h	C8000h	Pins 1 & 2, 5 & 6 closed
320h	CC000h	Pins 1 & 2 closed
340h	D0000h	Pins 5 & 6 closed
360h	D4000h	Pins 1 & 2, 5 & 6 open

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S26361-D633-V2

... continued from previous page.

INTERRUPT SELECTION		
IRQ	W20	W25
None	Open	Open
IRQ2/9	Open	Closed
IRQ3	Pins 1 & 2 closed	Open
IRQ4	Pins 3 & 4 closed	Open
IRQ5	Pins 5 & 6 closed	Open

DMA CHANNEL SELECTION		
Channel	W14	W23
3	Open	Pins 1 & 2, 3 & 4 closed
5	Pins 9 & 10, 11 & 12 closed	Open
6	Pins 5 & 6, 7 & 8 closed	Open
7	Pins 1 & 2, 3 & 4 closed	Open

WAIT STATE CONFIGURATION	
Wait states	W4
0	Closed
1	Open

SIGNAL QUALITY ERROR TEST CONFIGURATION	
Mode	W12
Enabled	Pins 2 & 3 closed
Disabled	Pins 1 & 2 closed