


TRENDWARE INTERNATIONAL, INC.
TOKEN-16

NIC Type: Token-Ring
Transfer Rate: 4/16Mbps
Data Bus: 16-bit ISA
Topology: Ring
Wiring Type: AUI transceiver via DB-15
Shielded twisted pair
Unshielded twisted pair
Boot ROM Available

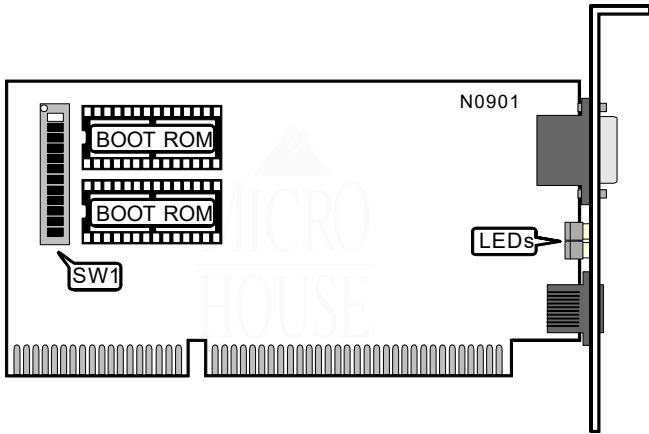

BOOT ROM ADDRESS						
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
i C8000h	Off	On	On	Off	On	On
C0000h	Off	On	On	On	On	On
C2000h	Off	On	On	On	On	Off
C4000h	Off	On	On	On	Off	On
C6000h	Off	On	On	On	Off	Off
C8000h	Off	On	On	Off	On	On
CA000h	Off	On	On	Off	On	Off
CC000h	Off	On	On	Off	Off	On
CE000h	Off	On	On	Off	Off	Off
D0000h	Off	On	Off	On	On	On
D2000h	Off	On	Off	On	On	Off
D4000h	Off	On	Off	On	Off	On
D6000h	Off	On	Off	On	Off	Off
D8000h	Off	On	Off	Off	On	On
DA000h	Off	On	Off	Off	On	Off
DC000h	Off	On	Off	Off	Off	On
DE000h	Off	On	Off	Off	Off	Off

Continued on next page...

TRENDWARE INTERNATIONAL, INC.
TOKEN-16

...continued from previous page

INTERRUPT SELECT		
IRQ	SW1/7	SW1/8
IRQ2	On	On
IRQ3	On	Off
IRQ7	Off	Off

PRIMARY/SECONDARY ADAPTER SETTING	
Setting	SW1/9
if Token-16 is the primary adapter	Off
Token-16 is the secondary adapter	On

SHARED RAM SIZE		
Setting	SW1/10	SW1/11
16KB	Off	On
8KB	On	On
32KB	On	Off
64KB	Off	Off

DATA TRANSFER RATE	
RATE	SW1/12
if 4Mbps	On
16Mbps	Off

DIAGNOSTIC LEDS		
Color	Status	Condition
Amber	On	4Mbps data rate enabled
Green	On	16Mbps data rate enabled