


Chapter 5: Jumper Settings  
ICL  
TOKENTEAM AT 16/4

NIC Type	Token Ring
Transfer Rate	4/16Mbps
Data Bus	16-bit ISA
Topology	Ring
Wiring Type	Shielded twisted pair Unshielded twisted pair
Boot ROM	Available

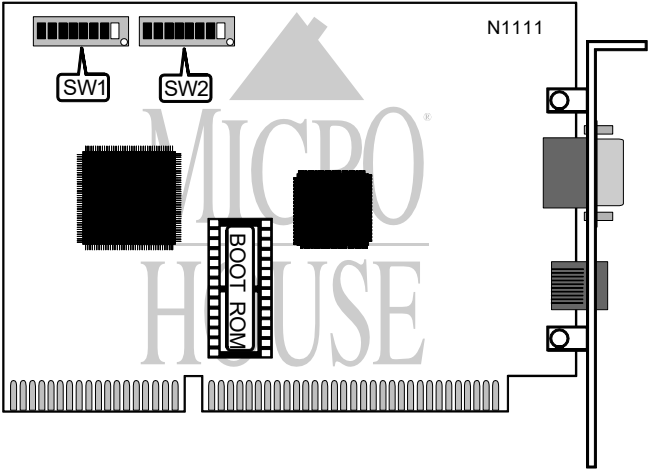

SPEED CONFIGURATION		
Speed	SW1/1	
4Mbps	Off	
16Mbps	On	

BASE I/O ADDRESS SELECTION		
Address	SW1/2	SW1/3
A20h	Off	Off
A24h	On	Off
A50h	Off	On
A54h	On	On

Continued next page...

# THE NETWORK INTERFACE CARD TECHNICAL GUIDE

ICL

TOKENTeam AT 16/4

... continued from previous page.

RPL CONFIGURATION					
Select	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
i CC000h	Off	On	On	Off	Off
C0000h	Off	Off	Off	Off	Off
C2000h	On	Off	Off	Off	Off
C4000h	Off	On	Off	Off	Off
C6000h	On	On	Off	Off	Off
C8000h	Off	Off	On	Off	Off
CA000h	On	Off	On	Off	Off
CE000h	On	On	On	Off	Off
D0000h	Off	Off	Off	On	Off
D2000h	On	Off	Off	On	Off
D4000h	Off	On	Off	On	Off
D6000h	On	On	Off	On	Off
D8000h	Off	Off	On	On	Off
DA000h	On	Off	On	On	Off
DC000h	Off	On	On	On	Off
DE000h	On	On	On	On	Off

INTERRUPT SELECTION			
IRQ	SW2/1	SW2/2	SW2/3
2/9	Off	Off	Off
3	On	Off	On
i 5	Off	On	On
7	On	On	Off
10	On	Off	Off
11	Off	On	Off
12	On	On	Off
15	Off	Off	On

DMA CHANNEL SELECTION			
Channel	SW2/4	SW2/5	SW2/6
0	On	On	Off
1	Off	Off	On
3	On	Off	On
5	Off	Off	On
6	On	Off	Off
7	Off	On	Off
Disabled	On	On	On

TECHNICAL NOTE	
Note: SW2/7 and SW2/8 are not used.	