


Chapter 5: Jumper Settings
TRENDWARE INTERNATIONAL INC.
T E - 1 6 C A T

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus/Star
Wiring Type Unshielded twisted pair
 AUI Transceiver via DB-15 port
 RG-58A/U 50ohm coaxial
Boot ROM Available

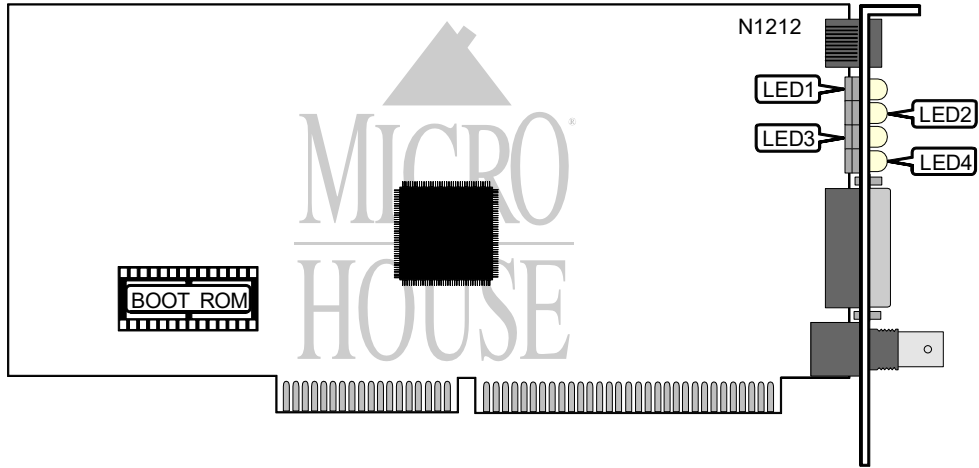

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Power on
LED1	Blinking	Data is being transmitted on 10Base-T
LED1	Off	Power off
LED2	On	Network connection is good for 10Base-T or 10Base-2
LED2	Blinking	Data is being received on 10Base-T
LED2	Off	Network connection broken for 10Base-T or 10Base-2
LED3	On	Network collision has been detected
LED3	Off	Network collision has not been detected
LED4	On	Bad cable connection has been detected on 10Base-2
LED4	Blinking	Jabber has been detected on network for 10Base-T or 10Base-2
LED4	Off	Jabber has not been detected on network for 10Base-T or 10Base-2
LED4	Off	10Base-2 cable connection is good