


Chapter 5: Jumper Settings
COMPEX, INC.
FREEDOMLINE ENET16-COMBO/FL

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair RG-58A/U 50ohm coaxial
Boot ROM	Available

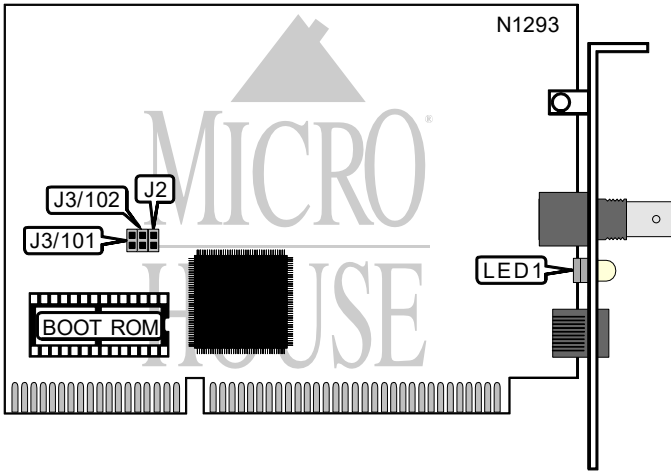

BASE I/O ADDRESS SELECTION		
Address	J3/101	J3/102
300h	Open	Open
240h	Closed	Open
2C0h	Open	Closed
340h	Closed	Closed

BOOT ROM CONFIGURATION	
Setting	J2
Enabled	Open
Disabled	Closed

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	10Base-T network connection is good
LED1	Off	10Base-T network connection is broken