


Chapter 5: Jumper Settings

STANDARD MICROSYSTEMS CORPORATION

TOKENCARD ELITE/A SMC8115T/A

NIC Type Token Ring
Transfer Rate 4/16Mbps
Data Bus 16-bit MCA
Topology Ring
Wiring Type Shielded twisted pair
 Unshielded twisted pair
Boot ROM Available

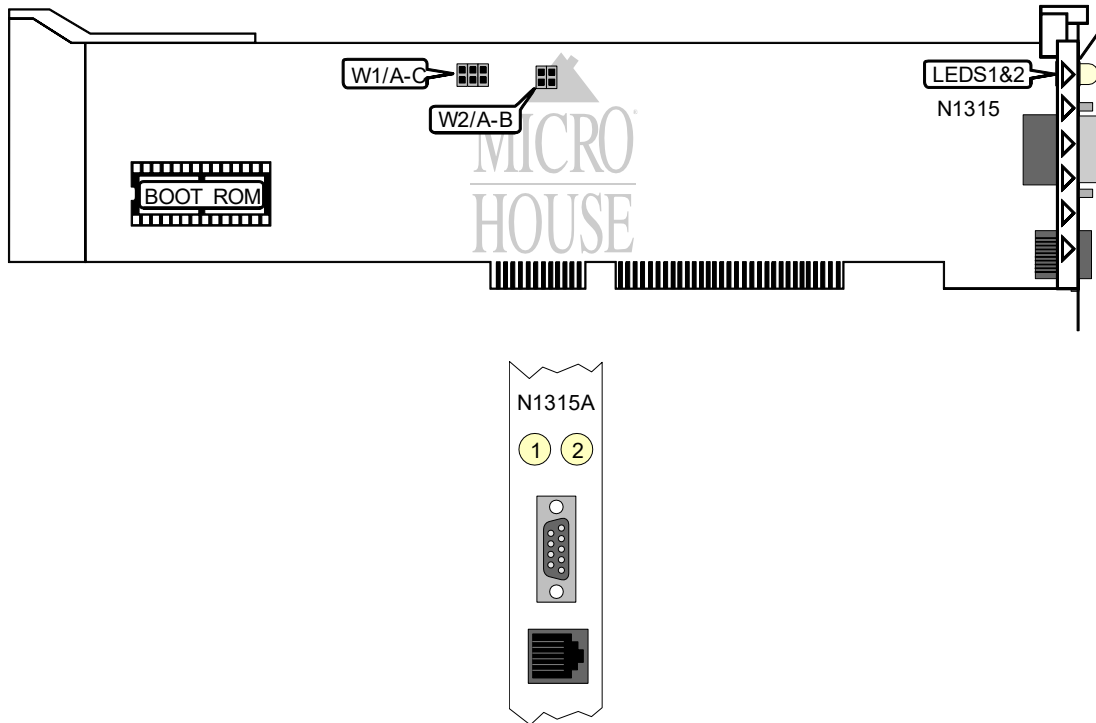

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Loopback test in progress
LED1	Off	Loopback test not in progress
LED2	On	Network connection is good
LED2	Off	Network connection is broken

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
STANDARD MICROSYSTEMS CORPORATION
TOKENCARD ELITE/A SMC8115T/A

... continued from previous page.

CONFIGURATION SETTINGS					
Base Address	IRQ	Shared RAM	W1/A	W1/B	W1/C
Software	Software	Software	Closed	Open	Open
280h	3	D0000h	Open	Closed	Open
300h	10	CC000h	Open	Open	Closed

BOOT ROM CONFIGURATION		
Setting	W2/A	W2/B
Disabled or software configurable	Closed	Open
D8000h	Open	Closed