


Chapter 5: Jumper Settings

GVC TECHNOLOGIES, INC.

8 - B I T 1 0 B A S E 2

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear Bus
Wiring Type	AUI Transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
	Rg-58C/A
Boot ROM	Available

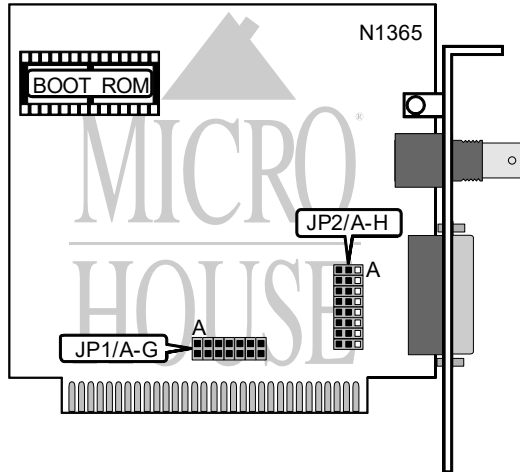

BOOT ROM CONFIGURATION	
Setting	JP1/A
Enabled	Closed
Disabled	Open

ADDRESS SELECTION			
Base I/O Address	Boot ROM Address	JP1/B	JP1/C
300h	C800h	Closed	Closed
320h	CC00h	Open	Closed
340h	D000h	Closed	Open
360h	D400h	Open	Open

INTERRUPT SELECTION				
IRQ	JP1/D	JP1/E	JP1/F	JP1/G
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
GVC TECHNOLOGIES, INC.
8 - B I T 1 0 B A S E 2

... continued from previous page.

CABLE TYPE SELECTION								
Cable Type	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F	JP2/G	JP2/H
AUI Transceiver via DB-15 port	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
RG-58A/U 50ohm coaxial	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
Note: Pins designated should be in the closed position.								