


PUREDATA PDE8023-32CT

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	32-bit EISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Available

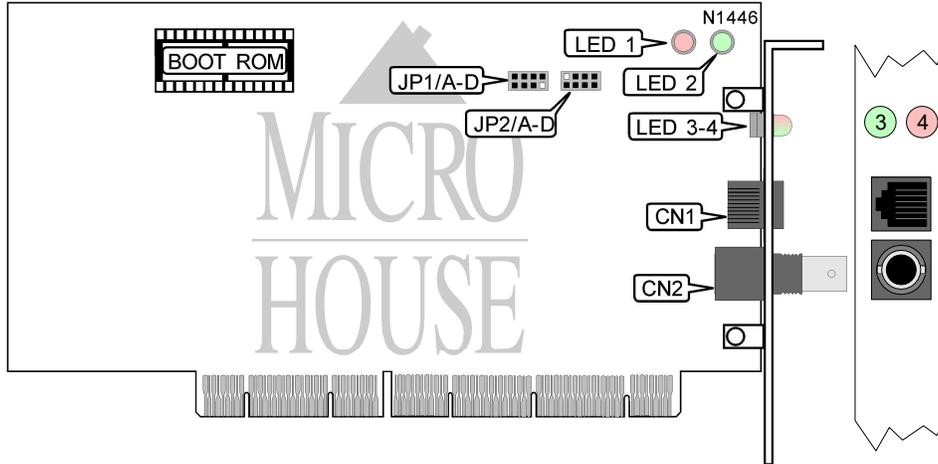

CONNECTIONS			
Function	Label	Function	Label
RJ-45/10BASE-T connector		RG-58A/U 50ohm coaxial/10BASE2 connector	CN2

WIRING TYPE SELECTION				
Setting	JP2/A	JP2/B	JP2/C	JP2/D
Software selectable	Closed	Open	Open	Open
10BASE-T	Open	Closed	Open	Open
10BASE5	Open	Open	Closed	Open
10BASE2	Open	Open	Open	Closed

CARD SELECTION				
Setting	JP1/A	JP1/B	JP1/C	JP1/D
1	Closed	Open	Open	Open
2	Open	Closed	Open	Open
3	Open	Open	Closed	Open
4	Open	Open	Open	Closed

Continued on next page . . .

PUREDATA
PDE8023-32CT

. . . continued from previous page

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED 1	Red	On	Network collision detected
LED 1	Red	Off	Network collision not detected
LED 2	Green	On	Link integrity is good
LED 2	Green	Off	Link integrity is broken
LED 3/4	Green	On	Adapter receiving data
LED 3/4	Green	Off	Adapter not receiving data
LED 3/4	Red	On	Adapter communicating with host
LED 3/4	Red	Off	Adapter not communicating