


EDIMAX COMPUTER COMPANY

EN-4200

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	32-bit VESA Local Bus
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Available

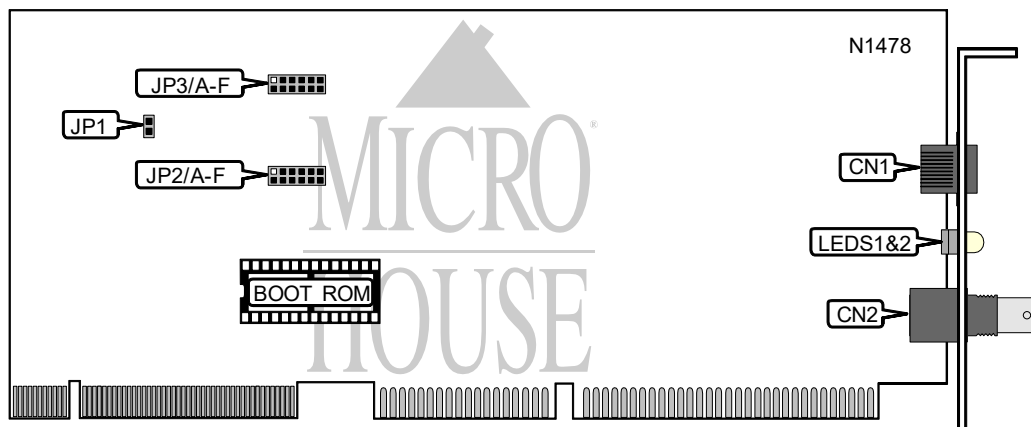

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	RG-58A/U 50ohm coaxial port	CN2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Mother board clock >33Mhz, 1 wait clock	JP1	Closed
Mother board clock =<33Mhz	JP1	Open
Factory configured - do not alter	JP3/A	Unidentified
Configuration select software	JP3/F	Closed
Configuration select hardware	JP3/F	Open

BIOS ADDRESS SELECTION				
Address	JP3/B	JP3/C	JP3/D	JP3/E
Disabled	Open	Open	Open	Open
C000h	Closed	Open	Open	Open
C400h	Closed	Closed	Open	Open
C800h	Open	Open	Closed	Open
CC00h	Closed	Open	Closed	Open
D000h	Open	Closed	Closed	Open
D400h	Closed	Closed	Closed	Open
D800h	Open	Open	Open	Closed
DC00h	Closed	Open	Open	Closed

Continued on next page. . .

EDIMAX COMPUTER COMPANY

EN-4200

... continued from previous page

BASE I/O ADDRESS SELECTION			
Setting	JP2/A	JP2/B	JP2/C
240h	Open	Closed	Open
280h	Closed	Closed	Open
2C0h	Open	Open	Closed
300h	Open	Open	Open
320h	Closed	Open	Closed
340h	Open	Closed	Closed
360h	Closed	Closed	Closed

INTERRUPT SELECTION			
IRQ	JP2/D	JP2/E	JP2/F
2/9	Closed	Closed	Open
3	Open	Open	Open
4	Closed	Open	Open
5	Open	Closed	Open
10	Open	Open	Closed
11	Closed	Open	Closed
12	Open	Closed	Closed
15	Closed	Closed	Closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Network connection is good
LED1	Yellow	Off	Network connection is broken
LED2	Green	On	Data is being transmitted/received
LED2	Green	Off	Data is not being transmitted/received
Note: The exact locations of LED1 and LED2 are unidentified.			