


# KYE INTERNATIONAL CORPORATION

## GE2000III-2

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Shielded/Unshielded twisted pair
	AUI transceiver
	RG-58A/U 50ohm coaxial
Boot ROM	Available

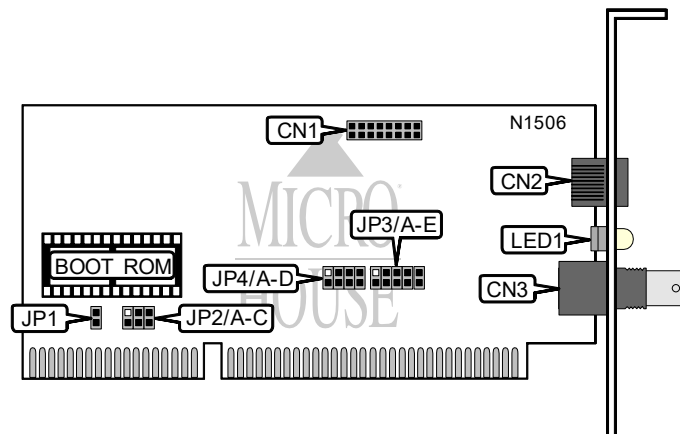

CONNECTIONS			
Function	Label	Function	Label
AUI transceiver	CN1	RG-58A/U 50ohm coaxial port	CN3
Shielded/Unshielded twisted pair port	CN2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Jumperless mode	JP1	Open	
Jumper mode	JP1	Closed	

INTERRUPT SELECTION			
IRQ	JP2/A	JP2/B	JP2/C
2/9	Open	Open	Open
3	Open	Open	Closed
4	Open	Closed	Open
5	Open	Closed	Closed
10	Closed	Open	Open
11	Closed	Open	Closed
12	Closed	Closed	Open
15	Closed	Closed	Closed

Continued on next page. . .

# KYE INTERNATIONAL CORPORATION

## GE2000III-2

... continued from previous page

BOOT ROM CONFIGURATION					
Setting	JP3/A	JP3/B	JP3/C	JP3/D	JP3/E
Disabled	Open	Open	Open	Open	Open
C000h, 32K	Open	Open	Open	Closed	Open
C800h, 32K	Closed	Open	Open	Closed	Open
D000h, 32K	Open	Closed	Open	Closed	Open
D800h, 32K	Closed	Closed	Open	Closed	Open
C000h, 64K	Open	Open	Closed	Closed	Open
D000h, 64K	Closed	Open	Closed	Closed	Open
C000h, 16K	Open	Open	Open	Open	Closed
C400h, 16K	Closed	Open	Open	Open	Closed
C800h, 16K	Open	Closed	Open	Open	Closed
CC00h, 16K	Closed	Closed	Open	Open	Closed
D000h, 16K	Open	Open	Closed	Open	Closed
D400h, 16K	Closed	Open	Closed	Open	Closed
D800h, 16K	Open	Closed	Closed	Open	Closed
DC00h, 16K	Closed	Closed	Closed	Open	Closed
C000h, Page	Open	Open	Open	Closed	Closed
C400h, Page	Closed	Open	Open	Closed	Closed
C800h, Page	Open	Closed	Open	Closed	Closed
CC00h, Page	Closed	Closed	Open	Closed	Closed
D000h, Page	Open	Open	Closed	Closed	Closed
D400h, Page	Closed	Open	Closed	Closed	Closed
D800h, Page	Open	Closed	Closed	Closed	Closed
DC00h, Page	Closed	Closed	Closed	Closed	Closed

BASE I/O ADDRESS SELECTION				
Address	JP4/A	JP4/B	JP4/C	JP4/D
200h	Open	Open	Closed	Open
220h	Closed	Open	Closed	Open
240h	Open	Closed	Closed	Open
260h	Closed	Closed	Closed	Open
280h	Open	Open	Closed	Closed
2A0h	Closed	Open	Closed	Closed
2C0h	Open	Closed	Closed	Closed
2E0h	Closed	Closed	Closed	Closed
300h	Open	Open	Open	Open
320h	Closed	Open	Open	Open
340h	Open	Closed	Open	Open
360h	Closed	Closed	Open	Open
380h	Open	Open	Open	Closed
3A0h	Closed	Open	Open	Closed
3C0h	Open	Closed	Open	Closed
3E0h	Closed	Closed	Open	Closed

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Network connection is good
LED1	Off	Network connection is broken