


WESTERN DIGITAL CORPORATION

ETHERCARD PLUS16

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

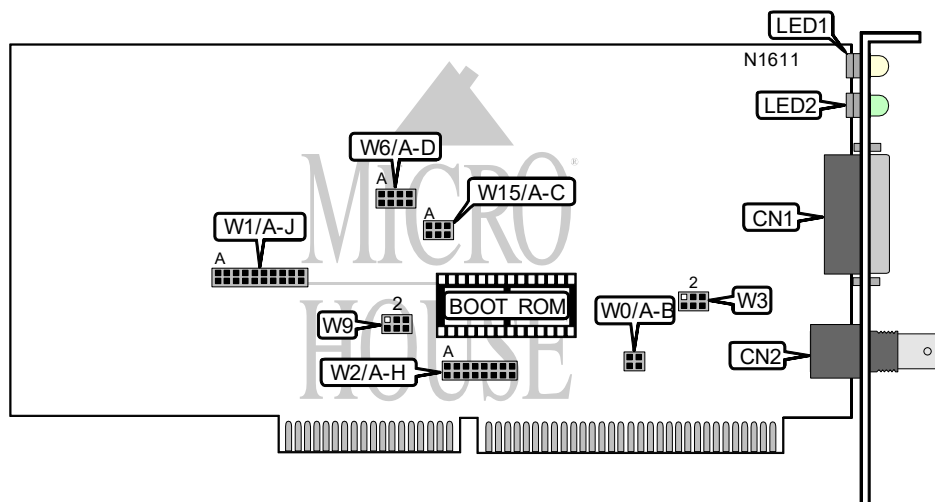

CONNECTIONS			
Function	Label	Function	Label
AUI transceiver via DB-15 port	CN1	RG-58A/U 50ohm coaxial port	CN2

WAIT STATE SELECTION			
Setting	W0/A	W0/B	
0	Closed	Closed	
1	Open	Open	
2	Closed	Closed	
4	Open	Open	

BASE I/O ADDRESS SELECTION										
Address	W1/A	W1/B	W1/C	W1/D	W1/E	W1/F	W1/G	W1/H	W1/I	W1/J
200h	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed
220h	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open
240h	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open
260h	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open
280h	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open
2A0h	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open
2C0h	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open
300h	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open
340h	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open
380h	Closed	Open	Open	Open	Open	Open	Open	Open	Open	Open

Continued on next page. . .

WESTERN DIGITAL CORPORATION

ETHERCARD PLUS16

... continued from previous page

INTERRUPT SELECTION								
IRQ	W2/A	W2/B	W2/C	W2/D	W2/E	W2/F	W2/G	W2/H
2/9	Open	Open	Open	Closed	Open	Open	Open	Open
3	Open	Open	Open	Open	Open	Open	Open	Closed
4	Open	Open	Open	Open	Open	Open	Closed	Open
5	Open	Open	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open
10	Open	Open	Closed	Open	Open	Open	Open	Open
11	Open	Closed	Open	Open	Open	Open	Open	Open
15	Closed	Open	Open	Open	Open	Open	Open	Open

CABLE TYPE SELECTION	
Type	W3
AUI transceiver via DB-15 port	Pins 1 & 2, 4 & 5 closed
RG-58A/U 50ohm coaxial port	Pins 2 & 3, 5 & 6 closed

ROM CONFIGURATION				
Size	W6/A	W6/B	W6/C	W6/D
None	Open	Open	Open	Closed
16K	Closed	Open	Open	Open
32K	Open	Closed	Open	Open
64K	Open	Open	Closed	Open

ROM ADDRESS CONFIGURATION			
Address	W15/A	W15/B	W15/C
C0000h	Open	Open	Open
C4000h	Closed	Open	Open
C8000h	Open	Closed	Open
D0000h	Open	Open	Closed
CC000h	Closed	Closed	Open
D4000h	Closed	Open	Closed
D8000h	Open	Closed	Closed
DC000h	Closed	Closed	Closed

ROM SIZE SELECTION	
Size	W9
16K	Pins 1 & 2, 4 & 5 closed
32K	Pins 1 & 2, 5 & 6 closed
64K	Pins 2 & 3, 5 & 6 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Data is being transmitted
LED1	Yellow	Off	Data is not being transmitted
LED2	Green	On	Data is being received
LED2	Green	Off	Data is not being received