


EVEREX SYSTEMS, INC.

SPEEDLINK/PC16 (VER.2)

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Not available

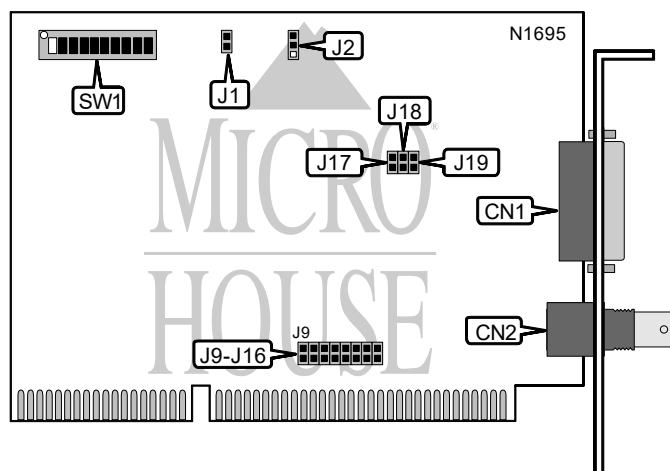

CONNECTIONS			
Function	Label	Function	Label
AUI transceiver via DB-15 port	CN1	RG-58A/U 50ohm coaxial port	CN2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Normal performance selected	J1	Open
High speed performance selected	J1	Closed

BASE I/O ADDRESS SELECTION						
Address	SW 1/1	SW 1/2	SW 1/3	SW 1/4	SW 1/5	SW 1/6
0360h	On	Off	Off	On	Off	Off
0320h	On	Off	On	On	Off	Off
0330h	Off	Off	On	On	Off	Off
0340h	On	On	Off	On	Off	Off
0350h	Off	On	Off	On	Off	Off
0380h	On	On	On	Off	Off	Off
0390h	Off	On	On	Off	Off	Off
03A0h	On	Off	On	Off	Off	Off

Continued on next page. . .

EVEREX SYSTEMS, INC.
SPEEDLINK/PC16 (VER.2)

... continued from previous page

INTERRUPT SELECTION								
IRQ	J9	J10	J11	J12	J12	J14	J15	J16
í 2/9	Closed	Open	Open	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Closed

CABLE TYPE SELECTION			
Type	J17	J18	J19
í RG-58A/U 50ohm coaxial	Closed	Closed	Closed
AUI transceiver via DB-15 port	Open	Open	Open

ROM ADDRESS SELECTION				
Address	SW1/7	SW1/8	SW1/9	SW1/10
None	Off	Off	Off	Off
C000	On	On	On	On
C400	On	Off	On	On
í C800	On	On	Off	On
CC00	On	Off	Off	On
D000	On	On	On	Off
D400	On	Off	On	Off
D800	On	On	Off	Off
DC00	On	Off	Off	Off