


OVISLINK TECHNOLOGIES CORPORATION

LE-8019R (REV. 3.0)

NIC Type	Ethernet
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus/Star
Wire Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA
Card Size	Half height, half length

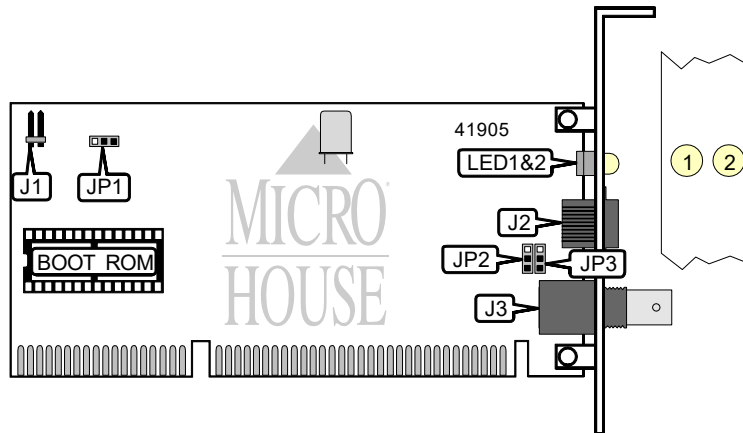

CONNECTIONS			
Function	Label	Function	Label
External transmit/receive LED connector	J1	RG-58A/U 50ohm coaxial connector	J3
UTP connector	J2		

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Card is configured for software configuration	JP1	Pins 2 & 3 closed
Card is configured for Plug-N-Play	JP1	Pins 1 & 2 closed
Maximum coaxial cable length is 185 meters	JP2	Pins 2 & 3 closed
Maximum coaxial cable length is 300 meters	JP2	Pins 1 & 2 closed
Coaxial connector is not terminated	JP3	Pins 2 & 3 closed
Coaxial connector is terminated	JP3	Pins 1 & 2 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
J1	N/A	Blinking	Card is transmitting or receiving data
J1	N/A	Off	Card is not transmitting or receiving data
LED1	Unidentified	On	No valid network signal detected
LED1	Unidentified	Off	Valid network signal detected
LED2	Unidentified	On	Network connection is good
LED2	Unidentified	Blinking	Network connection is intermittent
LED2	Unidentified	Off	Network connection is broken