


3COM CORPORATION

FDDILINK (3C796)

NIC Type	FDDI
Processor	68000
Processor Speed	Unidentified
I/O Options	Optical bypass relay
Maximum Onboard Memory	1MB RAM
Boot ROM	Not available
Network Transfer Rate	100Mbps
Topology	Ring
Wire Type	Fiber optic cable
Data Bus	32-bit PCI
Card Size	Full height, half length

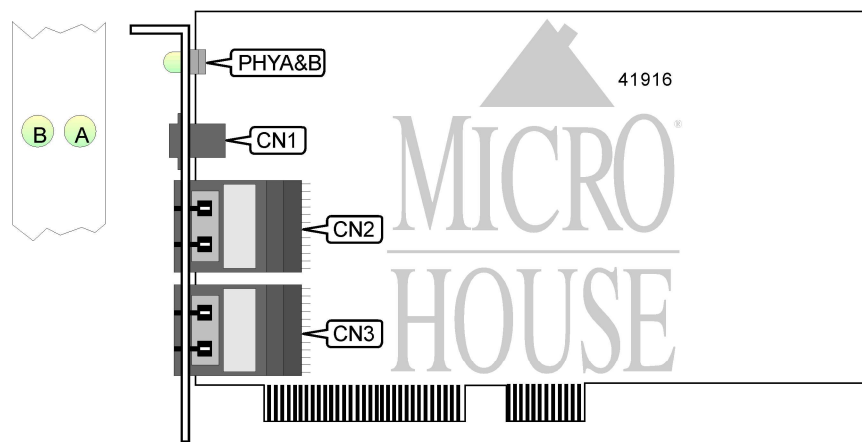

CONNECTIONS			
Function	Label	Function	Label
Optical bypass relay	CN1	Secondary fiber optic SC cable connector	CN3
Primary fiber optic SC cable connector	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
PHYA	Green	On	Network connection on primary connector is good
PHYA	Green	Blinking	Card is attempting to connect to network via primary connector
PHYA	Green/Yellow	Alternating	Card is on standby mode, or card not functioning properly
PHYA	Yellow	On	Network connection on primary connector is broken or self-test failed
PHYA	Yellow	Blinking	Network topology on primary connector is invalid
PHYA	N/A	Off	Card is not receiving power
PHYB	Green	On	Network connection on secondary connector is good
PHYB	Green	Blinking	Card is attempting to connect to network via secondary connector
PHYB	Yellow	On	Network connection on secondary connector is broken or self-test failed
PHYB	Yellow	Blinking	Network topology on secondary connector is invalid
PHYB	N/A	Off	Card is not receiving power