


DIAMOND FLOWER, INC.

NET-760ECT

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	16KB
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA

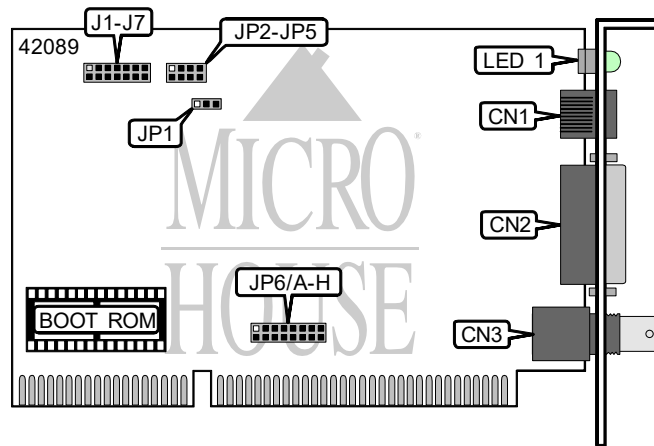

CONNECTIONS			
Function	Label	Function	Label
RJ-45 connector	CN1	RG-58A/U connector	CN3
AUI transceiver via DB-15 port	CN2		

SOFTWARE/JUMPER SELECT			
Setting	JP2	JP3	JP4
Card is software configurable	Open	Open	Closed
Card is jumper configurable	Closed	Closed	Open

Note: If card is set to "software configurable", jumper cab on IRQ block should be removed.

INTERRUPT SELECTION (JP6)								
IRQ	A	B	C	D	E	F	G	H
2	Closed	Open	Open	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Closed

Continued on next page. . .

DIAMOND FLOWER, INC.

NET-760ECT

... continued from previous page

ROM ADDRESS SELECTION				
Address	J1	J2	J3	J4
í Disabled	Open	Open	Open	N/A
C0000H	Open	Open	Closed	Open
C4000H	Open	Open	Closed	Closed
C8000H	Open	Closed	Open	Open
CC000H	Open	Closed	Open	Closed
D0000H	Open	Closed	Closed	Open
D4000H	Open	Closed	Closed	Closed
D8000H	Closed	Open	Open	Open
DC000H	Closed	Open	Open	Closed

BASE I/O ADDRESS SELECTION			
Setting	J5	J6	J7
240h	Open	Closed	Open
280h	Open	Closed	Closed
2C0h	Closed	Open	Open
320h	Closed	Open	Closed
í 330h	Open	Open	Open
340h	Closed	Closed	Open
360h	Closed	Closed	Closed

AT BUS COMPATIBILITY SELECT (JP1)			
Setting	A	B	C
í System compatible w/IBM PC/AT bus	Open	Closed	Closed
System not compatible w/IBM PC/AT bus	Closed	Closed	Open

CABLE TYPE SELECTION	
Type	JP5
í BNC/RJ-45 (auto select) enabled	Open
AUI enabled	Closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	UTP link is good
LED1	Green	Off	UTP link is broken