


# DIGITAL EQUIPMENT CORPORATION ETHERWORKS TURBO PCI EHTERNET CONTROLLER

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	20Mbps (Full Duplex)
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Data Bus	32-bit PCI

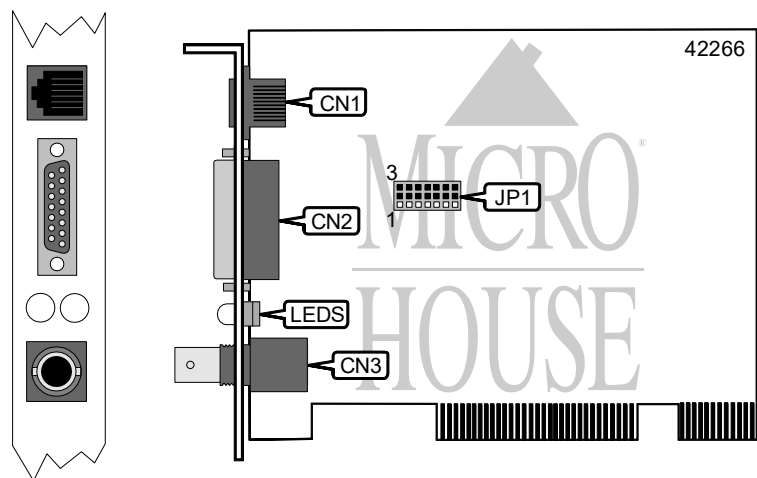

CONNECTIONS			
Function	Label	Function	Label
UTP via RJ-45 connector	CN1	RG-58A/U connector	CN3
AUI transceiver via DB-15 port	CN2		

USER CONFIGURABLE SETTINGS	
Function	JP1
AUI connection to 10Base2 Thin Wire Ethernet network enabled	Rows 1 & 2 closed
AUI connection to Ethernet network using AUI cable enabled	Rows 2 & 3 closed
Note: For connection to a 10Base-T twisted pair Ethernet network, JP1 has no effect.	

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
Network Activity	Amber	On/Blinking	Data is being transmitted/received
Network Activity	Amber	Off	Data is not being transmitted/received
TP Link	Green	On	UTP link is good
TP Link	Green	Off	UTP link is broken
TP Link	Green	Blinking	UTP link is failing
Note: Exact configuration of LEDs is unidentified.			