


# EDIMAX

## 1000C/V2.3

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus
Wiring Type	AUI, RG-58A/U 50ohm coaxial
Data Bus	8-bit ISA

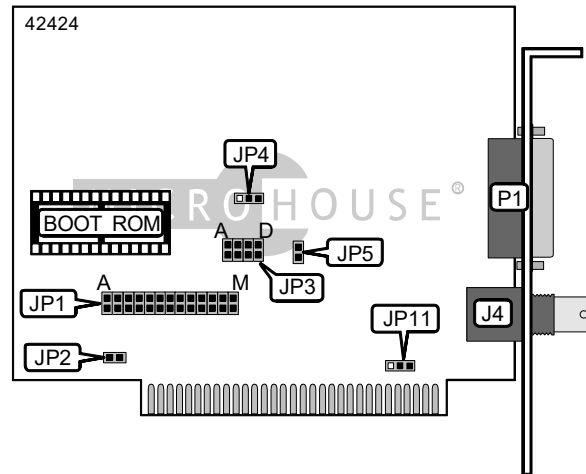

CONNECTIONS			
Function	Label	Function	Label
BNC connector	J4	AUI connector	P1
External LED connector	JP2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Boot ROM disabled	JP5	Open	
Boot ROM enabled	JP5	Closed	

BASE I/O ADDRESS SELECTION			
Setting	JP1/A	JP1/B	JP1/C
í 300h	Closed	Closed	Closed
320h	Closed	Closed	Open
340h	Closed	Open	Closed
360h	Closed	Open	Open

INTERRUPT SELECTION						
IRQ	JP1/D	JP1/E	JP1/F	JP1/G	JP1/H	JP1/I
2	Closed	Open	Open	Open	Open	Open
í 3	Open	Closed	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open
6	Open	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Open	Closed

Continued on next page. . .

# EDIMAX

## 1000C/V2.3

... continued from previous page

DMA CHANNEL SELECTION				
Channel	JP1/J	JP1/K	JP1/L	JP1/M
1	Closed	Open	Closed	Open
3	Open	Closed	Open	Closed

CABLE TYPE SELECTION		
Type	JP4	JP11
AUI	Pins 2 & 3 closed	Pins 1 & 2 closed
BNC	Pins 1 & 2 closed	Pins 2 & 3 closed

ROM ADDRESS SELECTION				
Address	JP3/A	JP3/B	JP3/C	JP3/D
C000h	Closed	Closed	Closed	Closed
C400h	Open	Closed	Closed	Closed
C800h	Closed	Open	Closed	Closed
CC00h	Open	Open	Closed	Closed
D000h	Closed	Closed	Open	Closed
D400h	Open	Closed	Open	Closed
D800h	Closed	Open	Open	Closed
DC00h	Open	Open	Open	Closed