
## ZENITH DATA SYSTEMS L N - 9 0

NIC Type Transfer Rate Data Bus Topology

Wiring Type Boot ROM Ethernet 10Mbps 8-bit ISA/16-bit ISA Linear Bus Star RG-58A/U 50ohm coaxial AUI transceiver via DB-15 port Not available

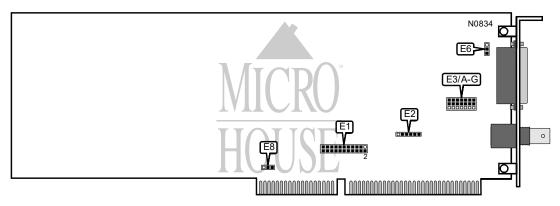

CABLE TYPE	
Туре	E3/A-G
RG-58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed

HEARTBEAT FUNCTION CONFIGURATION	
Mode	E6
í Heartbeat function enabled	Pins 1 & 2 closed
Heartbeat function disabled	Pins 2 & 3 closed

DATA TRANSFER SIZE SELECTION		
Size	E8	
í16-bit	Pins 1 & 2 closed	
8-bit	Pins 2 & 3 closed	

Continued next page...

## ZENITH DATA SYSTEMS L N - 9 0

... continued from previous page.

INTERRUPT SELECTION		
IRQ	E1	
2/9	Pins 1 & 2 closed	
3	Pins 3 & 4 closed	
4	Pins 5 & 6 closed	
5	Pins 7 & 8 closed	
6	Pins 9 & 10 closed	
7	Pins 11 & 12 closed	
10	Pins 13 & 14 closed	
11	Pins 15 & 16 closed	
12	Pins 17 & 18 closed	
13	Pins 19 & 20 closed	
14	Pins 21 & 22 closed	

BASE I/O ADDRESS		
Address	E2	
í 220h	Pins 1 & 2, 3 & 4, 5 & 6 closed	
228h	Pins 1 & 2, 3 & 4, closed	
230h	Pins 1 & 2, 5 & 6 closed	
238h	Pins 1 & 2 closed	
240h	Pins 3 & 4, 5 & 6 closed	
248h	Pins 3 & 4 closed	
250h	Pins 5 & 6 closed	