


3COM CORPORATION

FDDILINK-STP (3C770A)

Card Type	Network Interface card
NIC Type	FDDI
Boot ROM	Unavailable
Network Transfer Rate	Unidentified
Topology	Star
Wire Type	Shielded twisted pair
Data Bus	32-bit EISA

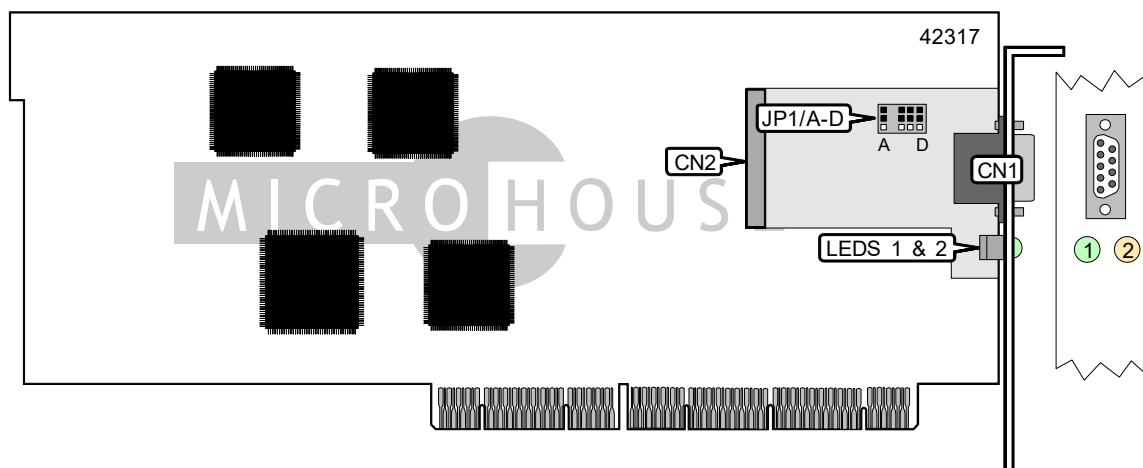

CONNECTIONS			
Function	Label	Function	Label
9-pin serial port	CN1	Transceiver module connector	CN2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Configured for SDDI networks	JP1/A-D	Pins 1 & 2 closed
Configured for pre-SDDI networks	JP1/A-D	Pins 2 & 3 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Data is being transmitted/received
LED1	Green	Off	Data is not being transmitted/received
LED2	Amber	On	Cable fault detected
LED2	Amber	Off	Cable fault not detected