


WESTERN DIGITAL CORPORATION
PARADISE VGA PLUS 16

Category	Video
Video Types Supported	VGA
Video Processor	WD PVGA1A
Highest Resolution Supported	800 x 600
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	256KB

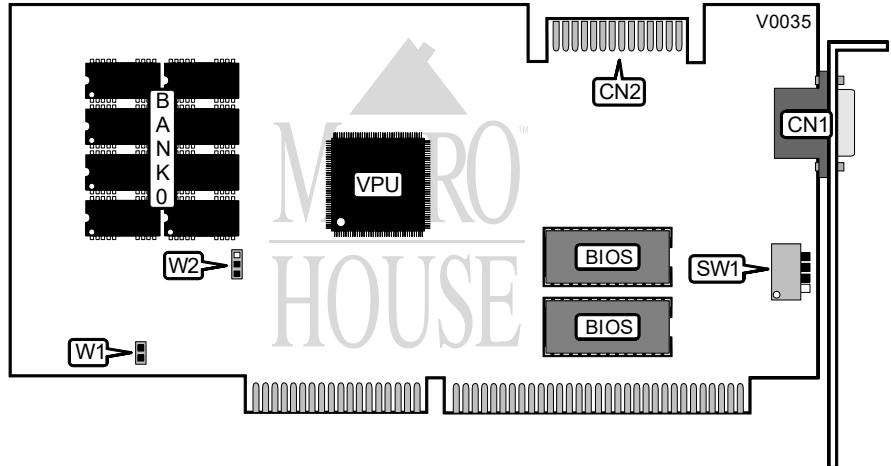

CONNECTIONS			
Purpose	Location	Location	Purpose
15-pin analog video port	CN1	VGA feature connector	CN2

FACTORY CONFIGURED - DO NOT ALTER	
Jumper/Switch	Position
W2	Pins 1 & 2 closed
SW1/3	Off

MANUAL 16-BIT BIOS CONFIGURATION	
Setting	W1
Initial setup and normal operation	Closed
Note: W1 should remain in the closed position unless the 16TEST program has been run and it recommends removing the jumper.	

Continued on next page . . .

WESTERN DIGITAL CORPORATION
PARADISE VGA PLUS 16

DISPLAY TIMING SELECTION	
Timing	SW1/1
i Standard PS/2 compatible display timing	Off
Special multi-frequency display timing	On

VGA MODE SWITCHING CONFIGURATION	
Mode	SW1/2
i PS/2 style	On
PC/AT style	Off

AUTONSENSE SELECTION	
Mode	SW1/4
i Autosense for 16-bit BIOS enabled	On
Autosense disabled, force 8-bit BIOS	Off