
## UNIDENTIFIED TRIDENT TVGA (16-BIT)

CategoryVideoVideo Types SupportedXVGAVideo ProcessorTVGA 8800CSHighest Resolution1024 x768SupportedTData Bus Type16-bit ISAMemory TypeDRAMMaximum Onboard Memory512KB

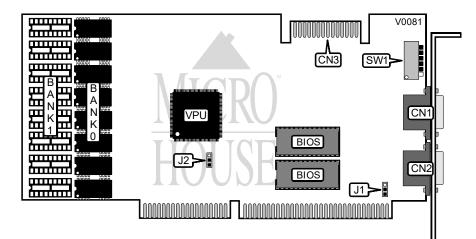

CONNECTIONS				
Purpos +	Location	Purpo: >	Location	
15-pin analog video port	CN1	VGA feature connector	CN3	
9-pin TTL video port	CN2			

MONITOR TYPE SELECTION					
Туре	J1	SW1/1	SW1/2	SW1/3	SW1/4
í Analog monitor	Pins 2 & 3 closed	On	On	On	On
TTL monitor	Pins 1 & 2 closed	Off	Off	Off	Off

ADDRESS DECODE SELECTION				
Setting	SW1/5			
í Fast	On			
Slow	Off			

Continued on next page . . .

## UNIDENTIFIED TRIDENT TVGA (16-BIT)

. . . continued from previous page

BUS DATA PATH SELECTION		
Bus	J2	SW1/6
í 16-bit	Pins 1 & 2 closed	Off
8-bit	Pins 2 & 3 closed	On

DRAM CONFIGURATION			
Size	Bank (	Bank <sup>r</sup>	
256KB	(8) 41256	None	
512KB	(8) 41256	(8) 41256	