


DTK COMPUTER, INC.
AT-RAM BANK

Card Type	Memory
Chipset/Controller	N/A
I/O Options	N/A
Maximum DRAM	2048KB

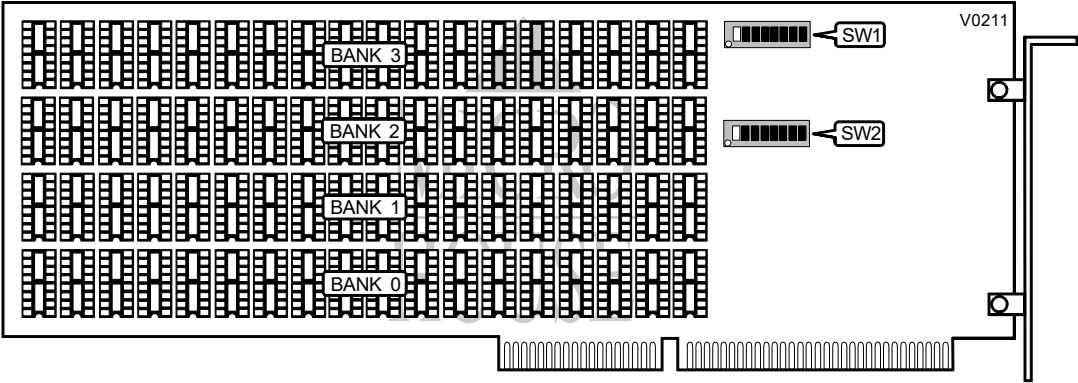

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(18) 41256	None	None	None
1MB	(18) 41256	(18) 41256	None	None
1.5MB	(18) 41256	(18) 41256	(18) 41256	None
2MB	(18) 41256	(18) 41256	(18) 41256	(18) 41256

Continued on next page . . .

DTK COMPUTER, INC.
AT-RAMBANK

STARTING MEMORY ADDRESS SELECTION									
Memory	Address	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW1/8
512KB	080000h	Off	Off	On	Off	Off	Off	Off	Off
1MB	100000h	Off	Off	Off	On	Off	Off	Off	On
1.25MB	120000h	On	Off	Off	On	Off	Off	Off	On
1.25MB	140000h	Off	On	Off	On	Off	Off	Off	On
1.375MB	160000h	On	On	Off	On	Off	Off	Off	On
1.5MB	180000h	Off	Off	On	On	Off	Off	Off	On
1.625MB	1A0000h	On	Off	On	On	Off	Off	Off	On
1.75MB	1C0000h	Off	On	On	On	Off	Off	Off	On
1.875MB	1E0000h	On	On	On	On	Off	Off	Off	On
2MB	200000h	Off	Off	Off	Off	On	Off	Off	On
2.125MB	220000h	On	Off	Off	Off	On	Off	Off	On
2.25MB	240000h	Off	On	Off	Off	On	Off	Off	On
2.375MB	260000h	On	On	Off	Off	On	Off	Off	On
2.5MB	280000h	Off	Off	On	Off	On	Off	Off	On
2.625MB	2A0000h	On	Off	On	Off	On	Off	Off	On
2.75MB	2C0000h	Off	On	On	Off	On	Off	Off	On
2.875MB	2E0000h	On	On	On	Off	On	Off	Off	On
3MB	300000h	Off	Off	Off	On	On	Off	Off	On
3.125MB	320000h	On	Off	Off	On	On	Off	Off	On
3.25MB	340000h	Off	On	Off	On	On	Off	Off	On
3.375MB	360000h	On	On	Off	On	On	Off	Off	On
3.5MB	380000h	Off	Off	On	On	On	Off	Off	On
3.625MB	3A0000h	On	Off	On	On	On	Off	Off	On
3.75MB	3C0000h	Off	On	On	On	On	Off	Off	On
3.875MB	3E0000h	On	On	On	On	On	Off	Off	On
4MB	400000h	Off	Off	Off	Off	Off	On	Off	On
4.125MB	420000h	On	Off	Off	Off	Off	On	Off	On
4.25MB	440000h	Off	On	On	On	On	On	Off	On
4.375MB	460000h	On	On	Off	Off	Off	On	Off	On
4.5MB	480000h	Off	Off	On	Off	Off	On	Off	On
4.625MB	4A0000h	On	Off	On	Off	Off	On	Off	On
4.75MB	4C0000h	Off	On	On	Off	Off	On	Off	On
4.875MB	4E0000h	On	On	On	Off	Off	On	Off	On
5.0MB	500000h	Off	Off	Off	On	Off	On	Off	On
5.125MB	520000h	On	Off	Off	On	Off	On	Off	On
5.25MB	540000h	Off	On	Off	On	Off	On	Off	On
5.375MB	560000h	On	On	Off	On	Off	On	Off	On
5.5MB	580000h	Off	Off	On	On	Off	On	Off	On
5.625MB	5A0000h	On	Off	On	On	Off	On	Off	On
5.75MB	5C0000h	Off	On	On	On	Off	On	Off	On
5.875MB	5E0000h	On	On	On	On	Off	On	Off	On

Continued on next page . . .

DTK COMPUTER, INC.
AT-RAMBANK

... continued from previous page

STARTING MEMORY ADDRESS SELECTION									
Memory	Address	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW1/8
6MB	600000h	Off	Off	Off	Off	On	On	Off	On
6.125MB	620000h	On	Off	Off	Off	On	On	Off	On
6.25MB	640000h	Off	On	Off	Off	On	On	Off	On
6.375MB	660000h	On	On	Off	Off	On	On	Off	On
6.5MB	680000h	Off	Off	On	Off	On	On	Off	On
6.625MB	6A0000h	On	Off	On	Off	On	On	Off	On
6.75MB	6C0000h	Off	On	On	Off	On	On	Off	On
6.875MB	6E0000h	On	On	On	Off	On	On	Off	On
7MB	700000h	Off	Off	Off	On	On	On	Off	On
7.125MB	720000h	On	Off	Off	On	On	On	Off	On
7.25MB	740000h	Off	On	Off	On	On	On	Off	On
7.375MB	760000h	On	On	Off	On	On	On	Off	On
7.5MB	780000h	Off	Off	On	On	On	On	Off	On
7.625MB	7A0000h	On	Off	On	On	On	On	Off	On
7.75MB	7C0000h	Off	On	On	On	On	On	Off	On
7.875MB	7E0000h	On	On	On	On	On	On	Off	On
8MB	800000h	Off	Off	Off	Off	Off	Off	On	On
8.125MB	820000h	On	Off	Off	Off	Off	Off	On	On
8.25MB	840000h	Off	On	Off	Off	Off	Off	On	On
8.375MB	860000h	On	On	Off	Off	Off	Off	On	On
8.5MB	880000h	Off	Off	On	Off	Off	Off	On	On
8.625MB	8A0000h	On	Off	On	Off	Off	Off	On	On
8.75MB	8C0000h	Off	On	On	Off	Off	Off	On	On
8.875MB	8E0000h	On	On	On	Off	Off	Off	On	On
9MB	900000h	Off	Off	Off	On	Off	Off	On	On
9.125MB	920000h	On	Off	Off	On	Off	Off	On	On
9.25MB	940000h	Off	On	Off	On	Off	Off	On	On
9.375MB	960000h	On	On	Off	On	Off	Off	On	On
9.5MB	980000h	Off	Off	On	On	Off	Off	On	On
9.625MB	9A0000h	On	Off	On	On	Off	Off	On	On
9.75MB	9C0000h	Off	On	On	On	Off	Off	On	On
9.875MB	9E0000h	On	On	On	On	Off	Off	On	On
10MB	A00000h	Off	Off	Off	Off	On	Off	On	On
10.125MB	A20000h	On	Off	Off	Off	On	Off	On	On
10.25MB	A40000h	Off	On	Off	Off	On	Off	On	On
10.375MB	A60000h	On	On	Off	Off	On	Off	On	On
10.5MB	A80000h	Off	Off	On	Off	On	Off	On	On
10.625MB	AA0000h	On	Off	On	Off	On	Off	On	On
10.75MB	AC0000h	Off	On	On	Off	On	Off	On	On
10.875MB	AE0000h	On	On	On	Off	On	Off	On	On

Continued on next page . . .

DTK COMPUTER, INC.
AT-RAMBANK

... continued from previous page

STARTING MEMORY ADDRESS SELECTION									
Memory	Address	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW1/8
11MB	B00000h	Off	Off	Off	On	On	Off	On	On
11.125MB	B20000h	On	Off	Off	On	On	Off	On	On
11.25MB	B40000h	Off	On	Off	On	On	Off	On	On
11.375MB	B60000h	On	On	Off	On	On	Off	On	On
11.5MB	B80000h	Off	Off	On	On	On	Off	On	On
11.625MB	BA0000h	On	Off	On	On	On	Off	On	On
11.75MB	BC0000h	Off	On	On	On	On	Off	On	On
11.87MB	BE0000h	On	On	On	On	On	Off	On	On
12MB	C00000h	Off	Off	Off	Off	Off	On	On	On
12.125MB	C20000h	On	Off	Off	Off	Off	On	On	On
12.25MB	C40000h	Off	On	Off	Off	Off	On	On	On
12.375MB	C60000h	On	On	Off	Off	Off	On	On	On
12.5MB	C80000h	Off	Off	On	Off	Off	On	On	On
12.625MB	CA0000h	On	Off	On	Off	Off	On	On	On
12.75MB	CC0000h	Off	On	On	Off	Off	On	On	On
12.87MB	CE0000h	On	On	On	Off	Off	On	On	On
13MB	C00000h	Off	Off	Off	On	Off	On	On	On
13.125MB	D20000h	On	Off	Off	On	Off	On	On	On
13.25MB	D40000h	Off	On	Off	On	Off	On	On	On
13.375MB	D60000h	On	On	Off	On	Off	On	On	On
13.5MB	D80000h	Off	Off	On	On	Off	On	On	On
13.625MB	DA0000h	On	Off	On	On	Off	On	On	On
13.75MB	DC0000h	Off	On	On	On	Off	On	On	On
13.87MB	DE0000h	On	On	On	On	Off	On	On	On
14MB	C00000h	Off	Off	Off	Off	On	On	On	On
14.125MB	E20000h	On	Off	Off	Off	On	On	On	On
14.25MB	E40000h	Off	On	Off	Off	On	On	On	On
14.375MB	E60000h	On	On	Off	Off	On	On	On	On
14.5MB	E80000h	Off	Off	On	Off	On	On	On	On
14.625MB	EA0000h	On	Off	On	Off	On	On	On	On
14.75MB	EC0000h	Off	On	On	Off	On	On	On	On
14.87MB	EE0000h	On	On	On	Off	On	On	On	On
15MB	F00000h	Off	Off	Off	On	On	On	On	On
15.125MB	F20000h	On	Off	Off	On	On	On	On	On
15.25MB	F40000h	Off	On	Off	On	On	On	On	On
15.375MB	F60000h	On	On	Off	On	On	On	On	On
15.5MB	F80000h	Off	Off	On	On	On	On	On	On
15.625MB	FA0000h	On	Off	On	On	On	On	On	On
15.75MB	FC0000h	Off	On	On	On	On	On	On	On
15.87MB	FE0000h	On	On	On	On	On	On	On	On

Continued on next page . . .

DTK COMPUTER, INC.
AT-RAMBANK

... continued from previous page

I/O PORT ADDRESS CONFIGURATION				
Address	SW1/1	SW1/2	SW1/3	SW1/4
258h - 259h	Off	On	Off	Off
268h - 269h	Off	Off	Off	Off
208h - 209h	On	On	On	On
218h - 219h	On	Off	On	On
228h - 229h	On	Off	On	On
238h - 239h	Off	Off	On	On
248h - 249h	On	On	Off	On
278h - 279h	Off	Off	Off	On
288h - 289h	On	On	On	Off
298h - 299h	Off	On	On	Off
2A8h - 2A9h	On	Off	On	Off
2B8h - 2B9h	Off	Off	On	Off
2C8h - 2C9h	On	On	Off	Off
2D8h - 2D9h	Off	On	Off	Off
2E8h - 2E9h	On	Off	Off	Off
2F8h - 2F9h	Off	Off	Off	Off

MEMORY CARD CONFIGURATION			
Expanded	Conventional/Expanded memory	SW1/5	SW1/6
0KB	2MB	On	On
0KB	1.5MB	On	Off
0KB	1MB	Off	On
0KB	512KB	Off	Off
2MB	0KB	Off	Off
1.5MB	0KB	Off	Off
1MB	0KB	Off	Off
512KB	0KB	Off	Off

PARITY CONFIGURATION	
Parity	SW1/8
Enabled	On
Disabled	Off

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/7	N/A