


# ORCHID TECHNOLOGY

## RAMQUEST 8/16

Card Type	Memory card
Chipset/Controller	N/A
I/O Options	N/A
Maximum DRAM	32MB

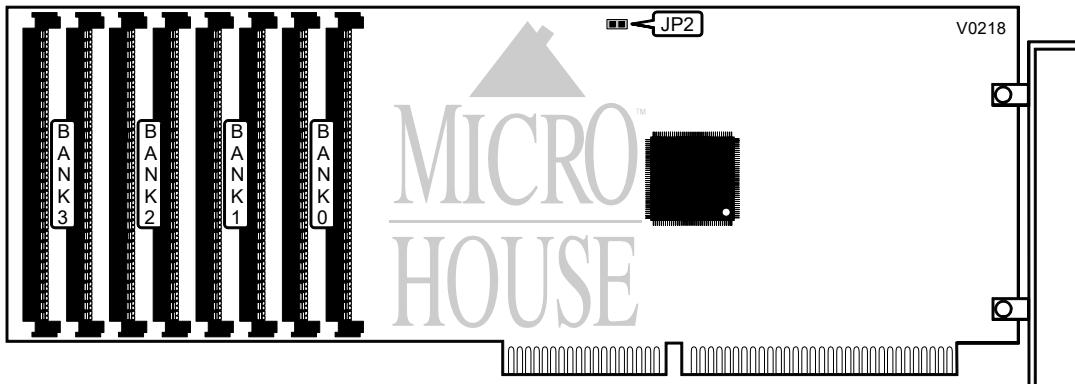

CARD MEMORY SELECTION	
Setting	JP2
Card configuration memory normal	Closed
Card configuration memory reset	Open

*Continued on next page . . .*

ORCHID TECHNOLOGY  
RAMQUEST 8/16

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	None	None	None
1MB	(2) 256K x 9	(2) 256K x 9	None	None
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	None
2MB	(2) 256K x 9			
2.5MB	(2) 256K x 9	(2) 1M x 9	None	None
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	None
3.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9
4MB	(2) 1M x 9	(2) 1M x 9	None	None
4.5MB	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9	None
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	None
6.5MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9
8MB	(2) 1M x 9			
8MB	(2) 4M x 9	None	None	None
10MB	(2) 4M x 9	(2) 1M x 9	None	None
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	None
14MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9
16MB	(2) 4M x 9	(2) 4M x 9	None	None
18MB	(2) 4M x 9	(2) 4M x 9	(2) 1M x 9	None
20MB	(2) 4M x 9	(2) 4M x 9	(2) 1M x 9	(2) 1M x 9
24MB	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9	None
32MB	(2) 4M x 9			