


KOUWELL ELECTRONIC CORPORATION
KW-524J

Card Type
Chipset/Controller
I/O Options
Maximum DRAM

Multi I/O card
Unidentified
Parallel ports (2), serial ports (2)
N/A

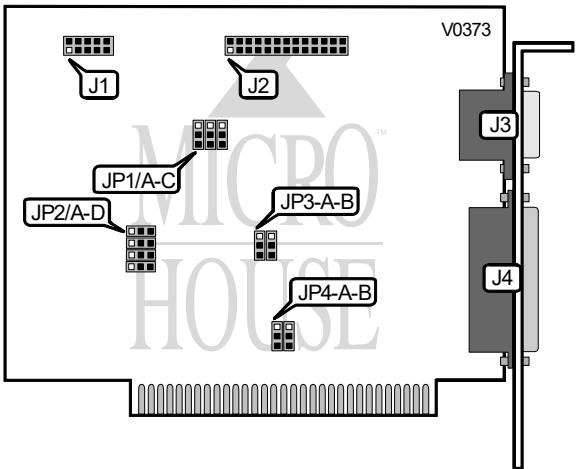

CONNECTIONS			
Purpose :	Location	Purpose :	Location
Serial port 2	J1	Serial port 1	J3
Parallel port 2	J2	Parallel port 1	J4

PRIMARY SERIAL PORT INTERRUPT SELECT			
IRQ	J '1/A	J '1/B	J '1/C
IRQ4	Open	Open	Pins 1 & 2 closed
IRQ3	Open	Pins 1 & 2 closed	Open
IRQ9	Pins 1 & 2 closed	Open	Open

SECONDARY SERIAL PORT INTERRUPT SELECT			
IRQ	J '1/A	J '1/B	J '1/C
IRQ3	Open	Pins 2 & 3 closed	Open
IRQ4	Open	Open	Pins 2 & 3 closed
IRQ9	Pins 2 & 3 closed	Open	Open

Continued on next page . . .

KOUWELL ELECTRONIC CORPORATION
KW-524J

... continued from previous page

SERIAL PORT CONFIGURATION					
Port 1 (J3)	Port 2 (J1)	JP2/A	JP2/B	JP2/C	JP2/D
COM1	COM2	Open	Open	Pins 1 & 2 closed	Pins 2 & 3 closed
COM1	COM3	Open	Pins 1 & 2 closed	Open	Pins 2 & 3 closed
COM1	COM4	Pins 1 & 2 closed	Open	Open	Pins 2 & 3 closed
COM2	COM1	Open	Open	Pins 2 & 3 closed	Pins 1 & 2 closed
COM2	COM3	Open	Pins 1 & 2 closed	Pins 2 & 3 closed	Open
COM2	COM4	Pins 1 & 2 closed	Open	Pins 2 & 3 closed	Open
COM3	COM1	Open	Pins 2 & 3 closed	Open	Pins 1 & 2 closed
COM3	COM2	Open	Pins 2 & 3 closed	Pins 1 & 2 closed	Open
COM3	COM4	Pins 1 & 2 closed	Pins 2 & 3 closed	Open	Open
COM4	COM1	Pins 2 & 3 closed	Open	Open	Pins 1 & 2 closed
COM4	COM2	Pins 2 & 3 closed	Open	Pins 1 & 2 closed	Open
COM4	COM3	Pins 2 & 3 closed	Pins 1 & 2 closed	Open	Open
Disabled	COM1	Open	Open	Open	Pins 1 & 2 closed
Disabled	COM2	Open	Open	Pins 1 & 2 closed	Open
Disabled	COM3	Open	Pins 1 & 2 closed	Open	Open
Disabled	COM4	Pins 1 & 2 closed	Open	Open	Open
COM1	Disabled	Open	Open	Open	Pins 2 & 3 closed
COM2	Disabled	Open	Open	Pins 2 & 3 closed	Open
COM3	Disabled	Open	Pins 2 & 3 closed	Open	Open
COM4	Disabled	Pins 2 & 3 closed	Open	Open	Open
Disabled	Disabled	Open	Open	Open	Open

PRIMARY PARALLEL PORT CONFIGURATION	
Address	JP3/B
í 378h	Pins 2 & 3 closed
278h	Pins 1 & 2 closed
Disabled	Open

SECONDARY PARALLEL PORT CONFIGURATION	
Address	JP3/A
í 278h	Pins 2 & 3 closed
378h	Pins 1 & 2 closed
Disabled	Open

PRIMARY PARALLEL PORT INTERRUPT SELECT	
IRQ	JP4/A
í IRQ7	Pins 2 & 3 closed
IRQ5	Pins 1 & 2 closed

Continued on next page ...

KOUWELL ELECTRONIC CORPORATION
KW-524J

... continued from previous page

SECONDARY PARALLEL PORT INTERRUPT SELECT	
IRQ	JP4/B
IRQ5	Pins 2 & 3 closed
IRQ7	Pins 1 & 2 closed