


# PINE TECHNOLOGY

## PT-601/602

**Card Type**  
**Chipset/Controller**  
**I/O Options**  
**Maximum DRAM**

Multi I/O  
 Unidentified  
 Game port, parallel port, serial ports (2)  
 N/A

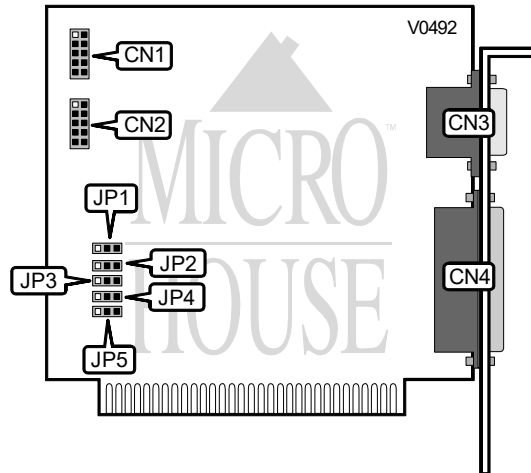

CONNECTIONS			
Port	Location	Port	Location
Serial port 1	CN1	Game port	CN3
Serial port 2	CN2	Parallel port	CN4

GAME PORT CONFIGURATION	
Setting	JP1
Enabled	Pins 2 & 3 closed
Disabled	Pins 1 & 2 closed

SERIAL PORT CONFIGURATION			
Port 1 (CN1)	Port 2 (CN2)	P2	P3
COM1	COM2	Pins 2 & 3 closed	Pins 2 & 3 closed
COM1	COM4	Pins 2 & 3 closed	Pins 1 & 2 closed
COM3	COM2	Pins 1 & 2 closed	Pins 2 & 3 closed
COM3	COM4	Pins 1 & 2 closed	Pins 1 & 2 closed
Disabled	COM2	Open	Pins 2 & 3 closed
Disabled	COM4	Open	Pins 1 & 2 closed
COM1	Disabled	Pins 2 & 3 closed	Open
COM3	Disabled	Pins 1 & 2 closed	Open
Disabled	Disabled	Open	Open

Continued on next page . . .

... continued from previous page

PARALLEL PORT INTERRUPT SELECT	
IRQ	JP4
IRQ7	Pins 2 & 3 closed
IRQ5	Pins 1 & 2 closed
Disabled	Open

PARALLEL PORT CONFIGURATION	
LPT	JP5
1	Pins 2 & 3 closed
2	Pins 1 & 2 closed
Disabled	Open