


UNIDENTIFIED
PE-520

Card Type	Memory card
Chipset/Controller	None
I/O Options	None
Maximum DRAM	4MB

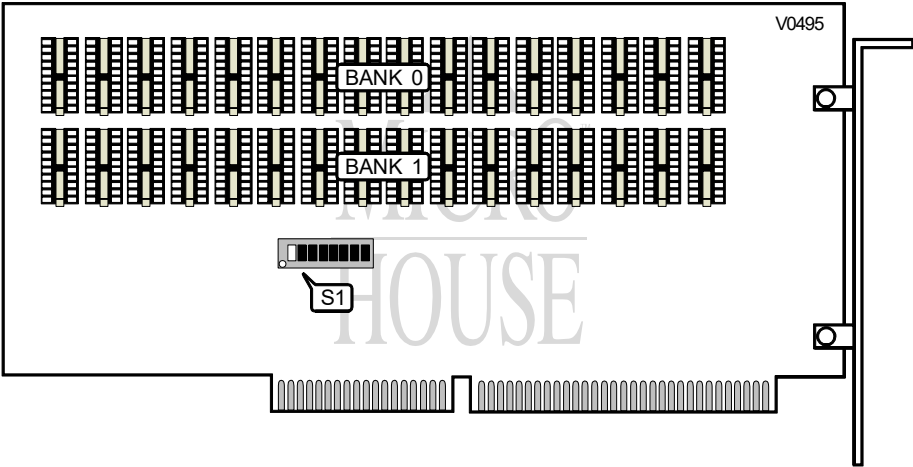

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	N/A
1MB	(18) 41256	(18) 41256
2MB	(18) 411000	N/A
4MB	(18) 411000	(18) 411000

41256 DRAM CONFIGURATION (CONTINUED)										
Start	Base	Ext.	S1/1	S1/2	S1/3	S1/4	S1/5	S1/6	S1/7	S1/8
512KB	512KB	0KB	Off	On	On	N/A	On	On	On	On
640KB	640KB	0KB	Off	Off	On	N/A	On	On	On	On
1024KB	640KB	384KB	Off	On	Off	N/A	On	On	On	On
1536KB	512KB	1024KB	Off	Off	On	N/A	Off	Off	Off	Off
2048KB	640KB	1408KB	Off	On	Off	N/A	Off	Off	Off	Off
2560KB	512KB	2048KB	Off	Off	On	N/A	On	Off	Off	Off
3072KB	640KB	2432KB	Off	On	Off	N/A	On	Off	Off	Off
3584KB	512KB	3072KB	Off	Off	On	N/A	Off	On	Off	Off
4096KB	640KB	3456KB	Off	On	Off	N/A	Off	On	Off	Off
4608KB	512KB	4096KB	Off	Off	On	N/A	On	On	Off	Off

Continued on next page . . .

UNIDENTIFIED
PE-520

... continued from previous page

41256 DRAM CONFIGURATION (CONTINUED)										
Start	Base	Ext.	S1/1	S1/2	S1/3	S1/4	S1/5	S1/6	S1/7	S1/8
5120KB	640KB	4480KB	Off	On	Off	N/A	On	On	Off	Off
5632KB	512KB	5120KB	Off	Off	On	N/A	Off	Off	On	Off
6144KB	640KB	5504KB	Off	On	Off	N/A	Off	Off	On	Off
6656KB	512KB	6144KB	Off	Off	On	N/A	On	Off	On	Off
7168KB	640KB	6528KB	Off	On	Off	N/A	On	Off	On	Off
7680KB	512KB	7168KB	Off	Off	On	N/A	Off	On	On	Off
8192KB	640KB	7552KB	Off	On	Off	N/A	Off	On	On	Off
8704KB	512KB	8192KB	Off	Off	On	N/A	On	On	On	Off
9216KB	640KB	8576KB	Off	On	Off	N/A	On	On	On	Off
9728KB	512KB	9216KB	Off	Off	On	N/A	Off	Off	Off	On
10240KB	640KB	9600KB	Off	On	Off	N/A	Off	Off	Off	On
10752KB	512KB	10240KB	Off	Off	On	N/A	On	Off	Off	On
11264KB	640KB	10624KB	Off	On	Off	N/A	On	Off	Off	On
11776KB	512KB	11264KB	Off	Off	On	N/A	Off	On	Off	On
12288KB	640KB	11648KB	Off	On	Off	N/A	Off	On	Off	On
12800KB	512KB	12288KB	Off	Off	On	N/A	On	On	Off	On
13312KB	640KB	12672KB	Off	On	Off	N/A	On	On	Off	On
13824KB	512KB	13312KB	Off	Off	On	N/A	Off	Off	On	On
14336KB	640KB	13696KB	Off	On	Off	N/A	Off	Off	On	On
14848KB	512KB	14336KB	Off	Off	On	N/A	On	Off	On	On
15360KB	640KB	14720KB	Off	On	Off	Off	On	Off	On	On

411000 DRAM CONFIGURATION										
Start	Base	Ext.	S1/1	S1/2	S1/3	S1/4	S1/5	S1/6	S1/7	S1/8
512KB	512KB	0KB	On	On	On	N/A	On	On	On	On
640KB	640KB	0KB	On	Off	On	N/A	On	On	On	On
1024KB	640KB	384KB	On	On	Off	N/A	On	On	On	On
1536KB	512KB	1024KB	On	Off	On	N/A	Off	Off	Off	Off
2048KB	640KB	1408KB	On	On	Off	N/A	Off	Off	Off	Off
2560KB	512KB	2048KB	On	Off	On	N/A	On	Off	Off	Off
3072KB	640KB	2432KB	On	On	Off	N/A	On	Off	Off	Off
3584KB	512KB	3072KB	On	Off	On	N/A	Off	On	Off	Off
4096KB	640KB	3456KB	On	On	Off	N/A	Off	On	Off	Off
4608KB	512KB	4096KB	On	Off	On	N/A	On	On	Off	Off
5120KB	640KB	4480KB	On	On	Off	N/A	On	On	Off	Off
5632KB	512KB	5120KB	On	Off	On	N/A	Off	Off	On	Off
6144KB	640KB	5504KB	On	On	Off	N/A	Off	Off	On	Off
6656KB	512KB	6144KB	On	Off	On	N/A	On	Off	On	Off

Continued on next page ...

UNIDENTIFIED
PE-520

... continued from previous page

411000 DRAM CONFIGURATION (CONTINUED)										
Start	Base	Ext.	S1/1	S1/2	S1/3	S1/4	S1/5	S1/6	S1/7	S1/8
7168KB	640KB	6528KB	On	On	Off	N/A	On	Off	On	Off
7680KB	512KB	7168KB	On	Off	On	N/A	Off	On	On	Off
8192KB	640KB	7552KB	On	On	Off	N/A	Off	On	On	Off
8704KB	512KB	8192KB	On	Off	On	N/A	On	On	On	Off
9216KB	640KB	8576KB	On	On	Off	N/A	On	On	On	Off
9728KB	512KB	9216KB	On	Off	On	N/A	Off	Off	Off	On
10240KB	640KB	9600KB	On	On	Off	N/A	Off	Off	Off	On
10752KB	512KB	10240KB	On	Off	On	N/A	On	Off	Off	On
11264KB	640KB	10624KB	On	On	Off	N/A	On	Off	Off	On
11776KB	512KB	11264KB	On	Off	On	N/A	Off	On	Off	On
12288KB	640KB	11648KB	On	On	Off	N/A	Off	On	Off	On
12800KB	512KB	12288KB	On	Off	On	Off	On	On	Off	On
13312KB	640KB	12672KB	On	On	Off	Off	On	On	Off	On
13824KB	512KB	13312KB	On	Off	On	Off	Off	Off	On	On