


# MEDIA VISION TECHNOLOGY, INC.

## THUNDERBOARD (650-0007-03)

Card Type  
Chip Set  
I/O Options  
Data Bus

Sound card  
Yamaha  
Game port, microphone jack, line out  
8-bit ISA

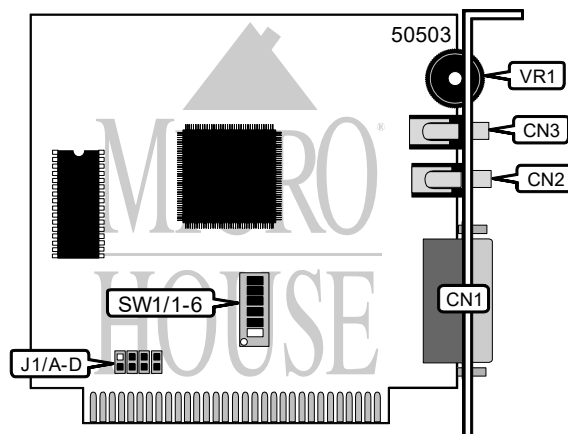

CONNECTIONS			
Function	Label	Function	Label
Game port	CN1	Line out	CN3
Microphone jack	CN2	Volume control	VR1

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	SW1/4	On	
í Factory configured - do not alter	SW1/5	On	
í Factory configured - do not alter	SW1/6	On	

I/O ADDRESS SELECTION			
Setting	SW 1/3	SW 1/2	SW 1/1
210	On	On	Off
í 220	On	Off	On
230	On	Off	Off
240	Off	On	On
250	Off	On	Off
260	Off	Off	On

INTERRUPT SELECTION				
Setting	J1/A	J1/B	J1/C	J1/D
IRQ2	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
í IRQ5	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Closed

Note: IRQ5 is the default for Windows and IRQ7 is the default for DOS,