


UNIDENTIFIED
SNB-C010

Card Type
Chipset Controller
I/O Options
Maximum Dram

Multi-I/O
Unidentified
Parallel port (1), Game port (1), Serial port (2), Floppy (1)
Unidentified

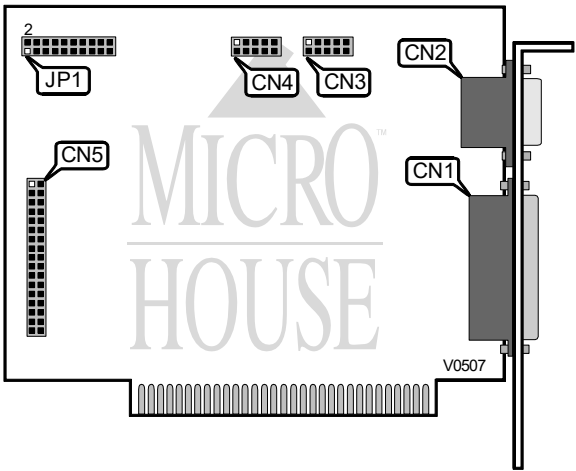

CONNECTIONS			
Pt. pose	Lo. ation	Pt. pose	Lo. ation
25-pin parallel printer port	CN1	10-pin serial port	CN4
15-pin game port	CN2	34-pin floppy drive	CN5
10-pin serial port	CN3		

GAME PORT SELECT	
Setting	JP1
Enabled	Pins 1 & 2 closed
Disabled	Pins 1 & 2 open

Continued on next page. . .

UNIDENTIFIED
SNB-C010

...continued from previous page

PARALLEL PORT SELECT	
Setting	JP1
LPT1	Pins 7 & 8 closed
LPT2	Pins 5 & 7 closed
Disable	All open

SERIAL PORT 1 SELECT	
Setting	JP1
COM1	Pins 9 & 10, 13 & 14 closed
COM3	Pins 9 & 10, 11 & 13 closed
Disable	All open

SERIAL PORT 2 SELECT	
Setting	JP1
COM2	Pins 15 & 16, 19 & 20 closed
COM4	Pins 15 & 16, 17 & 19 closed
Disable	All open

TIMER SELECT	
Setting	JP1
TIM1	Pins 3 & 4 closed
TIM2	Pins 4 & 6 closed
Disable	All open