


# ZENITH DATA SYSTEMS

## ID-190 FACSIMILE INTERFACE CARD

<b>Modem Type</b>	Fax/Scanner
<b>Maximum Fax Rate</b>	9600 bps
<b>Data Bus</b>	8-bit ISA
<b>Fax Class</b>	Unidentified
<b>Fax Modulation Protocol</b>	ITU-T V.29

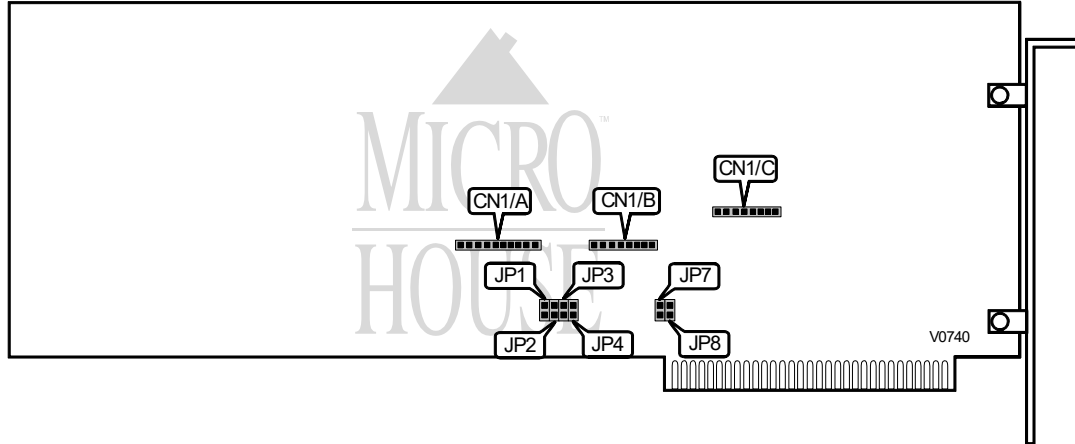

CONNECTIONS			
Purpose	Location	Purpose	Location
Daughter board connector 1	CN1/A	Daughter board connector 3	CN1/C
Daughter board connector 2	CN1/B		


INTERRUPT SELECT				
IRQ	JP1	JP2	JP3	JP4
IRQ2	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
IRQ4	Open	Open	Closed	Open
IRQ5	Open	Open	Open	Closed

BASE I/O ADDRESSES		
Addresses	P7	P8
1380-39F & 780-78Fh	Pins 1 & 2 closed	Pins 1 & 2 closed
220-23F & 620-620-62Fh	Pins 1 & 2 closed	Pins 2 & 3 closed
300-31F & 700-70Fh	Pins 2 & 3 closed	Pins 1 & 2 closed
110-12F & 510-51Fh	Pins 2 & 3 closed	Pins 2 & 3 closed

Continued on next page . . .

ZENITH DATA SYSTEMS  
ID-190 FACSIMILE INTERFACE CARD

... continued from previous page

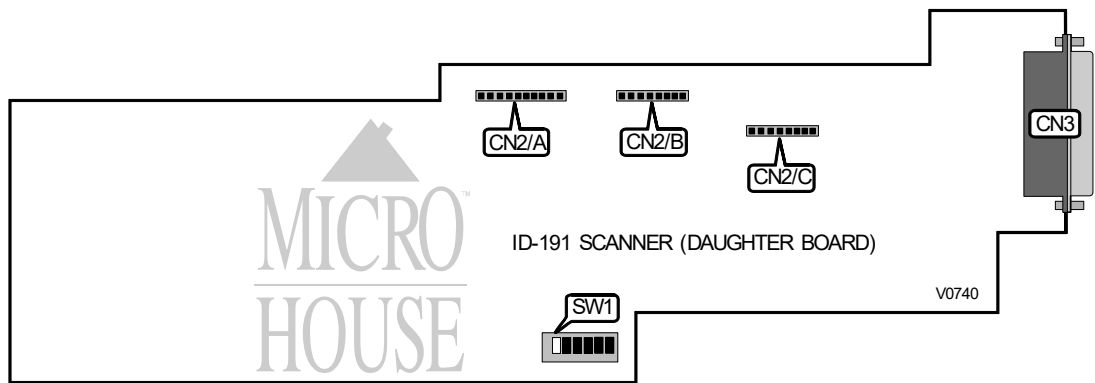

CONNECTIONS			
Purpose	Location	Purpose	Location
Daughter board connector 1	CN2/A	Daughter board connector 3	CN2/C
Daughter board connector 2	CN2/B	25 pin fax/scanner connector	CN3

BASE I/O ADDRESS (DAUGHTER)						
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
000h	On	On	On	On	On	On
010h	On	On	On	On	On	Off
020h	On	On	On	On	Off	On
030h	On	On	On	On	Off	Off
040h	On	On	On	Off	On	On
050h	On	On	On	Off	On	Off
060h	On	On	On	Off	Off	On
070h	On	On	On	Off	Off	Off

Continued on next page ...

# ZENITH DATA SYSTEMS

## ID-190 FACSIMILE INTERFACE CARD

... continued from previous page

BASE I/O ADDRESS (DAUGHTER)						
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
080h	On	On	Off	On	On	On
090h	On	On	Off	On	On	Off
100h	On	On	Off	On	Off	On
110h	On	On	Off	On	Off	Off
120h	On	On	Off	Off	On	On
130h	On	On	Off	Off	On	Off
140h	On	On	Off	Off	Off	On
150h	On	On	Off	Off	Off	Off
160h	On	Off	On	Off	Off	On
170h	On	Off	On	Off	Off	Off
180h	On	Off	Off	On	On	On
190h	On	Off	Off	On	On	Off
200h	On	Off	Off	On	Off	On
210h	On	Off	Off	On	Off	Off
220h	On	Off	Off	Off	On	On
230h	On	Off	Off	Off	On	Off
240h	On	Off	Off	Off	Off	On
250h	On	Off	Off	Off	Off	Off
260h	Off	On	On	Off	Off	On
270h	Off	On	On	Off	Off	Off
280h	Off	On	Off	On	On	On
290h	Off	On	Off	On	On	Off
300h	Off	Off	On	On	On	On
310h	Off	Off	On	On	On	Off
320h	Off	Off	On	On	Off	On
330h	Off	Off	On	On	Off	Off
340h	Off	Off	On	Off	On	On
350h	Off	Off	On	Off	On	Off
360h	Off	Off	On	Off	Off	On
370h	Off	Off	On	Off	Off	Off
380h	Off	Off	Off	On	On	On
390h	Off	Off	Off	On	On	Off
400h	Off	Off	Off	On	Off	On
410h	Off	Off	Off	On	Off	Off
420h	Off	Off	Off	Off	On	On
430h	Off	Off	Off	Off	On	Off
440h	Off	Off	Off	Off	Off	On
450h	Off	Off	Off	Off	Off	Off