


PROLINK COMPUTER, INC.
SOUNDPLUS-ES488

Card Type	Sound
Chipset Controller	ES-488
I/O Options	Game port (1), Line-in (1), Microphone jack (1), Speaker jack (1), Volume
Maximum Dram	N/A

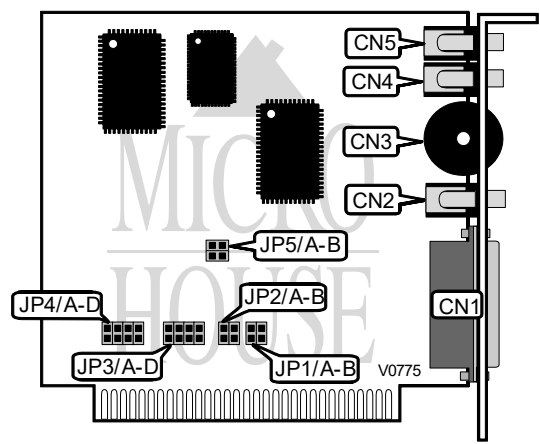

CONNECTIONS			
Pin position	Location	Pin position	Location
15-pin Game port	CN1	Line-in jack	CN4
Speaker jack	CN2	Microphone jack	CN5
Volume Control	CN3		

GAME PORT SELECT		
Setting	JP5/	JP5/
Enabled	Closed	Open
Disabled	Open	Closed

DRQ SELECT		
Setting	JP1/	JP1/
DRQ1	Closed	Open
DRQ3	Open	Closed

DACK SELECT		
Setting	JP2/	JP2/
DACK1	Closed	Open
DACK3	Open	Closed

Continued on next page. . .

PROLINK COMPUTER, INC.
SOUNDPLUS-ES488

...continued from previous page

INTERRUPT SELECT				
IRQ	JP3/A	JP3/B	JP3/C	JP3/D
IRQ7	Open	Open	Open	Closed
IRQ2	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
IRQ5	Open	Open	Closed	Open

I/O ADDRESS SELECT				
Address	JP4/A	JP4/B	JP4/C	JP4/D
220h	Closed	Closed	Open	Open
240h	Open	Open	Closed	Closed