
## MEDIA VISION TECHNOLOGY, INC. PRO AUDIOSPECTRUM PLUS

Card Type Sound Card
Chipset Controller Media Vision

I/O Options CD-ROM interface, CD audio in, MIDI/Game port, Microphone, Line in, Line

out, Speaker

Maximum Dram N/A

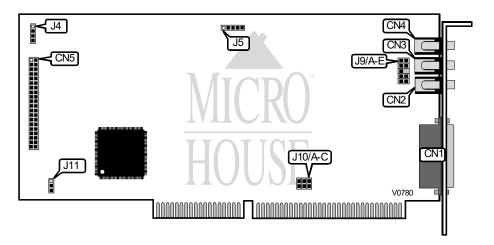

CONNECTIONS				
Pu pose	Lo ation	Pu pose	Lo ation	
15-pin MIDI/Game port	CN1	Sony CD-ROM connector	CN5	
Microphone	CN2	Speaker connector	J4	
Line out	CN3	CD-ROM audio in	J5	
Line in	CN4			

	I/O ADDRESS			
Addr ss	J '10/A	J '10/B	J '10/C	
220h	Closed	Open	Open	
230h	Open	Closed	Open	
240h	Open	Open	Closed	

DMA SF	DMA SHARING	
Setting	J11	
DMA sharing - enabled	Pins 2 & 3 closed	
DMA sharing - disabled	Pins 1 & 2 closed	

Continued on next page. . .

## MEDIA VISION TECHNOLOGY, INC. PRO AUDIOSPECTRUM PLUS

. . .continued from previous page

FACTORY CONF	FACTORY CONFIGURED SETTING		
Jumper	Setting		
J9/A	Closed		
J9/B	Closed		
J9/C	Open		
J9/D	Closed		
J9/E	Closed		