


PINE TECHNOLOGY

PT-602A

Card Type
Chipset/Controller
I/O Options
Maximum DRAM

Multi-I/O
Unidentified
Game port, parallel port, serial ports (2)
N/A

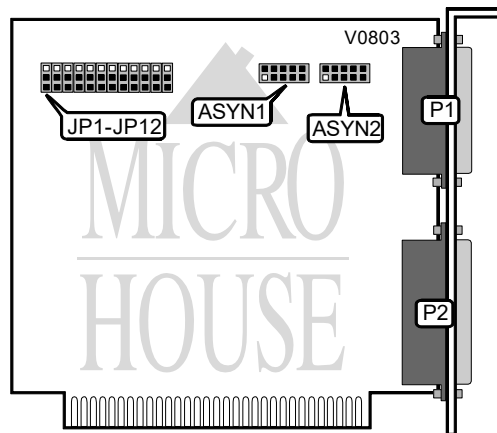

CONNECTIONS			
Purpose :	Location	Purpose :	Location
Game port	P1	Serial port 1	ASYN1
Parallel port	P2	Serial port 2	ASYN2

SERIAL PORT 1 CONFIGURATION		
COM	JP1	JP2
COM1	Pins 1 & 2 closed	Pins 1 & 2 closed
COM3	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	N/A	Pins 2 & 3 closed

SERIAL PORT 2 CONFIGURATION		
COM	JP3	JP4
COM2	Pins 1 & 2 closed	Pins 1 & 2 closed
COM4	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	N/A	Pins 2 & 3 closed

SERIAL PORT 1 INTERRUPT/ADDRESS SELECT	
IRQ/Address	JP8
IRQ4/3F8h	Pins 1 & 2 closed
IRQ3/3E8h	Pins 2 & 3 closed

Continued on next page. . .

PINE TECHNOLOGY
PT-602A

...continued from previous page

SERIAL PORT 2 INTERRUPT/ADDRESS SELECT	
IRQ/Address	JP9
í IRQ3/2F8h	Pins 1 & 2 closed
IRQ4/2E8h	Pins 2 & 3 closed

PARALLEL PORT CONFIGURATION		
LPT	JP5	JP6
í LPT1	Pins 1 & 2 closed	Pins 1 & 2 closed
LPT2	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	N/A	Pins 2 & 3 closed

PARALLEL PORT INTERRUPT/ADDRESS SELECT	
IRQ/Address	JP10
í IRQ7/378h	Pins 1 & 2 closed
IRQ5/278h	Pins 2 & 3 closed

GAME PORT	
Setting	JP7
í Enabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP11	Pins 1 & 2 closed
JP12	Pins 1 & 2 closed